











Test Report issued under the responsibility of:
DSTech Co., Ltd.

25, 2565 beon-gil, Jungbu-daero, Yangji-myun,
Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17162

TEST REPORT IEC 60335-2-17 Household and similar electrical appliances - Safety Part 2-17: Particular requirements for blankets, pads and similar flexible heating appliances
Report Number : DST-23S-0130 Date of issue : 2023-12-08 Total number of pages 105 pages
Applicant's name : VARWIN Address : 40, Saengan-ro, Wonsam-myeon, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea
Test specification: Standard : IEC 60335-2-17:2012, AMD1:2015, AMD2:2019 for use in conjunction with IEC 60335-1:2010 Test procedure : Circle PSE Non-standard test method : N/A
Test Report Form No. : IEC60335_2_17H_DST2312 Test Report Form(s) Originator : IMQ S.p.A. Master TRF : Dated 2017-08 Copyright © 2017 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed. This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.
This report is not related to KOLAS certification
Test item description : Electric mat
Trade Mark : —
Manufacturer : VARWIN
Model/Type reference : VS200J
Ratings : 100 V~, 50/60 Hz, 500 W

Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
<input checked="" type="checkbox"/>	Testing Laboratory:	DSTech Co., Ltd.
Testing location/ address.....:		25, 2565 beon-gil, Jungbu-daero, Yangji-myun, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17162
Tested by (name, function, signature).....:		 In-eung, KIM
Approved by (name, function, signature)....:		 Gweon, Hur
Testing procedure: CTF Stage 1:		
Testing location/ address.....:		
Tested by (name, function, signature).....:		
Approved by (name, function, signature)....:		
Testing procedure: CTF Stage 2:		
Testing location/ address.....:		
Tested by (name + signature)		
Witnessed by (name, function, signature) .:		
Approved by (name, function, signature)....:		
Testing procedure: CTF Stage 3:		
Testing procedure: CTF Stage 4:		
Testing location/ address.....:		
Tested by (name, function, signature).....:		
Witnessed by (name, function, signature) .:		
Approved by (name, function, signature)....:		
Supervised by (name, function, signature) :		

List of Attachments (including a total number of pages in each attachment): Attachment 1. Photographs (4 pages) Attachment 2. JAPAN NATIONAL DIFFERENCES (8 pages – not including the total number of pages)											
Summary of testing:											
Tests performed (name of test and test clause): All related clause	Testing location: DSTech Co., Ltd. 25, 2565 beon-gil, Jungbu-daero, Yangji-myun, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17162										
Summary of compliance with National Differences (List of countries addressed): <input checked="" type="checkbox"/> The product fulfils the requirements of J60335-1(H27), J60335-2-17(2021).											
Copy of marking plate:											
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="text-align: center; padding: 5px;">Electric mat</td> </tr> <tr> <td style="width: 30%; padding: 5px;">Model name</td> <td style="padding: 5px;">VS200J</td> </tr> <tr> <td style="padding: 5px;">Rating</td> <td style="padding: 5px;">100 V~, 50/60 Hz, 500 W</td> </tr> <tr> <td style="padding: 5px;">Manufacturer</td> <td style="padding: 5px;">VARWIN</td> </tr> <tr> <td style="padding: 5px; vertical-align: top;"> CAUTION: Read the instructions Do not insert pins Not to be used by very young children (0 - 3 years) </td> <td style="padding: 5px; text-align: center; vertical-align: middle;">   </td> </tr> </table>		Electric mat		Model name	VS200J	Rating	100 V~, 50/60 Hz, 500 W	Manufacturer	VARWIN	CAUTION: Read the instructions Do not insert pins Not to be used by very young children (0 - 3 years)	 
Electric mat											
Model name	VS200J										
Rating	100 V~, 50/60 Hz, 500 W										
Manufacturer	VARWIN										
CAUTION: Read the instructions Do not insert pins Not to be used by very young children (0 - 3 years)	 										

Test item particulars:	
Classification of installation and use:	Class II, Portable appliance
Supply Connection	Mains plug with supply cord (type Y attachment)
.....:	
Possible test case verdicts:	
- test case does not apply to the test object..... : N/A	
- test object does meet the requirement..... : P (Pass)	
- test object does not meet the requirement..... : F (Fail)	
Testing :	
Date of receipt of test item	2023-10-02
Date (s) of performance of tests	2023-10-06 to 2023-12-06
General remarks:	
"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.	
Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.	
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies)	VARWIN
	40, Saengan-ro, Wonsam-myeon, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea
General product information:	
- This appliance is electric mat for indoor use. - This appliance has a class II protection against electrical shocks and an ordinary IPX0 protection against harmful ingress of water.	

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
5	GENERAL CONDITIONS FOR THE TESTS		—
	Tests performed according to clause 5, e.g. nature of supply, sequence of testing, etc.		P
5.8.101	Controlled appliances supplied as specified for motor-operated appliances (IEC 60335-2-17)		P
5.101	Wraps tested as overblankets (IEC 60335-2-17)		N/A
6	CLASSIFICATION		—
6.1	Appliances of Class II or III (IEC 60335-2-17)	Class II appliance	P
	Class III appliances, rated voltage not exceeding 24 V (IEC 60335-2-17)		N/A
6.2	Protection against harmful ingress of water	IPX0	N/A
7	MARKING AND INSTRUCTIONS		—
7.1	Rated voltage or voltage range (V)	100 V	P
	Symbol for nature of supply, or :	symbol IEC 60417-5032	P
	Rated frequency (Hz)	50/60 Hz	P
	Rated power input (W), or :	500 W	P
	Rated current (A)		N/A
	Appliances marked with the rated power input (IEC 60335-2-17)	500 W	P
	Rated power input stated for each circuit separately and the information provided on a single label, if the appliance has two means of connection to the supply (IEC 60335-2-17)		N/A
	The rated power input may be expressed as 2 x rated power input for each circuit in watts (IEC 60335-2-17)		N/A
	Other ways may be used and the total given, provided they do not give rise to misunderstanding (IEC 60335-2-17)		N/A
	Parts of class III do not marked with rated voltage of appliance (IEC 60335-2-17)		N/A
	Manufacturer's or responsible vendor's name, trademark or identification mark	(see copy of marking plate)	P
	Model or type reference	(see copy of marking plate)	P
	Symbol IEC 60417-5172, for class II appliances	(see copy of marking plate)	P
	IP number, other than IPX0	IPX0	N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	Symbol IEC 60417-5180, for class III appliances, unless	Class II appliance	N/A
	the appliance is operated by batteries only	No batteries	N/A
	Symbol IEC 60417-5036, for the enclosure of electrically-operated water valves in external hose-sets for connection of an appliance to the water mains, if the working voltage exceeds extra-low voltage		N/A
	Manufacturer's or responsible vendor's name, trademark or identification mark (flexible parts and detachable covers) (IEC 60335-2-17)		P
	Detachable cover marked with model or type reference of the appliance intended to be use (IEC 60335-2-17)	No detachable covers	N/A
	Flexible part used with detachable control marked with the reference of the control unit (IEC 60335-2-17)		P
	Flexible part used with detachable transformer marked with the reference of the transformer (IEC 60335-2-17)		N/A
	Flexible parts:		—
	Read the instruction, or symbol ISO 7000-0790 (IEC 60335-2-17)		P
	Do not insert pin, or symbol shown in fig.102 (IEC 60335-2-17)		P
	Symbol "Not to be used by very young children (0-3 years)", or similar text (IEC 60335-2-17)		P
	Symbol ISO 7000-3114 and symbol ISO 7000-3124 (IEC 60335-2-17)		P
	Intended orientation of blankets and mattresses (IEC 60335-2-17)		N/A
	Do not use folded or rucked, or symbol shown in fig. 101 (underblankets, other than those having a heating element with PTC characteristics) (IEC 60335-2-17)		N/A
	Detachable covers:		—
	- symbol ISO 7000-0790 (IEC 60335-2-17)		N/A
	- symbol of fig. 102 (IEC 60335-2-17)		N/A
	Flexible part of blankets and detachable covers marked with symbols specified in ISO 3758 (IEC 60335-2-17)		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	Washable appliances fitted with a non-detachable flexible cord marked with "hand wash" symbol (IEC 60335-2-17)		N/A
	Non-washable appliances marked with "do not wash" symbol (IEC 60335-2-17)		P
7.2	Warning for stationary appliances for multiple supply	No stationary appliances	N/A
	Warning placed in vicinity of terminal cover		N/A
7.3	Range of rated values marked with the lower and upper limits separated by a hyphen	Single rated voltage	N/A
	Different rated values marked with the values separated by an oblique stroke		N/A
7.4	Appliances adjustable for different rated voltages, the voltage setting is clearly discernible		N/A
	Requirement met if frequent changes are not required and the rated voltage to which the appliance is to be adjusted is determined from a wiring diagram		N/A
7.5	Appliances with more than one rated voltage or one or more rated voltage ranges, marked with rated input or rated current for each rated voltage or range, unless		N/A
	the power input is related to the arithmetic mean value of the rated voltage range		N/A
	Relation between marking for upper and lower limits of rated power input or rated current and voltage is clear		N/A
7.6	Correct symbols used		P
	Symbol for nature of supply placed next to rated voltage		P
	Symbol for class II appliances placed unlikely to be confused with other marking		P
	Units of physical quantities and their symbols according to international standardized system		P
7.7	Connection diagram fixed to appliances to be connected to more than two supply conductors and appliances for multiple supply, unless	No multiple supply	N/A
	correct mode of connection is obvious		N/A
7.8	Except for type Z attachment, terminals for connection to the supply mains indicated as follows:		—
	- marking of terminals exclusively for the neutral conductor (letter N)		P

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	- marking of protective earthing terminals (symbol IEC 60417-5019)		N/A
	- marking not placed on removable parts		P
7.9	Marking or placing of switches which may cause a hazard		P
7.10	Indications of switches on stationary appliances and controls on all appliances by use of figures, letters or other visual means :	Visual means	P
	This applies also to switches which are part of a control		P
	If figures are used, the off position indicated by the figure 0		N/A
	The figure 0 indicates only OFF position, unless no confusion with the OFF position		N/A
7.11	Indication for direction of adjustment of controls		P
7.12	Instructions for safe use provided	User instruction provided	P
	Details concerning precautions during user maintenance		P
	The instructions state that:		—
	- the appliance is not to be used by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction		P
	- children being supervised not to play with the appliance		P
	For a part of class III construction supplied from a detachable power supply unit, the instructions state that the appliance is only to be used with the unit provided		N/A
	Instructions for class III appliances state that it must only be supplied at SELV, unless		N/A
	it is a battery-operated appliance, the battery being charged outside the appliance		N/A
	The instruction have to contain :		—
	Important instruction (IEC 60335-2-17)		P
	Retain for future use (IEC 60335-2-17)		P
	Substance of the instructions required in 7.1 (IEC 60335-2-17)		P
	Explain of symbols used (IEC 60335-2-17)		P

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	Overblanket or underblanket (IEC 60335-2-17)		N/A
	Setting the control for continuous use (IEC 60335-2-17)		N/A
	For blankets and mattresses, if the appliance is slept on with the controls set to a higher temperature the user may suffer skin burns or heat stroke (IEC 60335-2-17)		N/A
	For pads likely to be used for an extended period, controls adjusted to the setting recommended for continuous use (IEC 60335-2-17)		P
	Used only with detachable devices marked on the appliance (IEC 60335-2-17)		P
	Length and width of detachable cover of duvet (IEC 60335-2-17)		N/A
	Instruction for correct store (IEC 60335-2-17)		P
	When storing the appliance, allow it to cool down before folding (IEC 60335-2-17)		P
	Do not crease the appliance by placing items on top of it during storage (for blankets and pads only) (IEC 60335-2-17)		P
	Examine the appliance frequently (IEC 60335-2-17)		P
	Return to the supplier if has been misused (IEC 60335-2-17)		P
	Not intended for medical use in hospital (IEC 60335-2-17)		P
	Do not use if wet (not for moisture-proof appliances or Class III appliances)		P
	Do not use by persons insensitive to heat and other very vulnerable persons (IEC 60335-2-17)		P
	Do not use by children under the age of three (IEC 60335-2-17)		P
	For underblankets:		—
	- do not use on adjustable bed, or (IEC 60335-2-17)		N/A
	- check that the blanket and cord do not become trapped or rucked (IEC 60335-2-17)		N/A
	This blanket is not to be used by young children, unless the controls have been pre-set by a parent or guardian, or unless the child has been adequately instructed on how to operate the controls safely (IEC 60335-2-17)		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	Instructions for switch or control unit for washable appliances fitted with a non-detachable cord (IEC 60335-2-17)		N/A
	Cleaning instructions for non-washable appliances (IEC 60335-2-17)		P
7.12.1	Sufficient details for installation supplied		N/A
	For an appliance intended to be permanently connected to the water mains and not connected by a hose-set, this is stated	No connected water mains	N/A
7.12.2	Stationary appliances not fitted with means for disconnection from the supply mains having a contact separation in all poles that provide full disconnection under overvoltage category III, the instructions state that means for disconnection must be incorporated in the fixed wiring in accordance with the wiring rules	No stationary appliances	N/A
7.12.3	Insulation of the fixed wiring in contact with parts exceeding 50 K during clause 11; instructions state that the fixed wiring must be protected		N/A
7.12.4	Instructions for built-in appliances:		—
	- dimensions of space	No built-in appliances	N/A
	- dimensions and position of supporting and fixing		N/A
	- minimum distances between parts and surrounding structure		N/A
	- minimum dimensions of ventilating openings and arrangement		N/A
	- connection to supply mains and interconnection of separate components		N/A
	- allow disconnection of the appliance after installation, by accessible plug or a switch in the fixed wiring, unless		N/A
	a switch complying with 24.3		N/A
7.12.5	Replacement cord instructions, type X attachment with a specially prepared cord		N/A
	Replacement cord instructions, type Y attachment	In manual	P
	Replacement cord instructions, type Z attachment		N/A
7.12.6	Caution in the instructions for appliances incorporating a non-self-resetting thermal cut-out that is reset by disconnection of the supply mains, if this cut-out is required to comply with the standard		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
7.12.7	Instructions for fixed appliances stating how the appliance is to be fixed		N/A
7.12.8	Instructions for appliances connected to the water mains:		—
	- max. inlet water pressure (Pa) :	No water mains	N/A
	- min. inlet water pressure, if necessary (Pa)..... : :		N/A
	Instructions concerning new and old hose-sets for appliances connected to the water mains by detachable hose-sets		N/A
7.13	Instructions and other texts in an official language		P
7.14	Marking clearly legible and durable, rubbing test as specified	Legible and durable	P
	Marking on flexible parts and detachable covers, liquid detergent is used (IEC 60335-2-17)		P
	Height lettering on flexible part at least 2,5 mm (IEC 60335-2-17)		P
	Height symbols shown in Fig. 101, fig. 102 and symbol "not to be used by very young children (0-3 years)" at least 15 mm (IEC 60335-2-17)		P
	Height lettering of "Important instruction-Retain for future use" at least 4 mm (IEC 60335-2-17)		P
7.15	Markings on a main part		P
	Marking clearly discernible from the outside, if necessary after removal of a cover		P
	For portable appliances, cover can be removed or opened without a tool		P
	For stationary appliances, name, trademark or identification mark and model or type reference visible after installation		N/A
	For fixed appliances, name, trademark or identification mark and model or type reference visible after installation according to the instructions		N/A
	Indications for switches and controls placed on or near the components. Marking not on parts which can be positioned or repositioned in such a way that the marking is misleading		P
	Symbols on detachable covers visible from the outside after the cover has been fitted (IEC 60335-2-17)		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	Symbol IEC 60417-5018 placed next to symbol IEC 60417-5172 or symbol IEC 60417-5180 (IEC 60335-2-17)		N/A
7.16	Marking of a possible replaceable thermal link or fuse link clearly visible with regard to replacing the link	No replaceable components	N/A
7.101	Detachable control units marked with reference number (IEC 60335-2-17)		P
8	PROTECTION AGAINST ACCESS TO LIVE PARTS		—
8.1	Adequate protection against accidental contact with live parts		P
8.1.1	Requirement applies for all positions, detachable parts removed		P
	Lamps behind a detachable cover not removed, if conditions met		N/A
	Insertion or removal of lamps, protection against contact with live parts of the lamp cap		N/A
	Use of test probe B of IEC 61032, with a force not exceeding 1 N: no contact with live parts		P
8.1.2	Use of test probe 13 of IEC 61032, with a force not exceeding 1 N, through openings in class 0 appliances and class II appliances/constructions: no contact with live parts		P
	Test probe 13 also applied through openings in earthed metal enclosures having a non-conductive coating: no contact with live parts		N/A
8.1.3	For appliances other than class II, use of test probe 41 of IEC 61032, with a force not exceeding 1 N: no contact with live parts of visible glowing heating elements		P
8.1.4	Accessible part not considered live if:		—
	- safety extra-low a.c. voltage: peak value not exceeding 42.4 V		N/A
	- safety extra-low d.c. voltage: not exceeding 42.4 V		N/A
	- or separated from live parts by protective impedance		N/A
	If protective impedance: d.c. current not exceeding 2 mA, and		N/A
	a.c. peak value not exceeding 0.7 mA		N/A
	- for peak values over 42.4 V up to and including 450 V, capacitance not exceeding 0,1 μ F		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	- for peak values over 450 V up to and including 15 kV, discharge not exceeding 45 μ C		N/A
	- for peak values over 15kV, the energy in the discharge not exceeding 350 mJ		N/A
8.1.5	Live parts protected at least by basic insulation before installation or assembly:		—
	- built-in appliances		N/A
	- fixed appliances		N/A
	- appliances delivered in separate units		N/A
8.2	Class II appliances and constructions constructed so that there is adequate protection against accidental contact with basic insulation and metal parts separated from live parts by basic insulation only		N/A
	Only possible to touch parts separated from live parts by double or reinforced insulation		N/A
9	STARTING OF MOTOR-OPERATED APPLIANCES		—
	Requirements and tests are specified in part 2 when necessary		N/A
10	POWER INPUT AND CURRENT		—
10.1	Power input at normal operating temperature, rated voltage and normal operation not deviating from rated power input by more than shown in table 1 :	(see appended table)	P
	Test carried out at upper and lower limits of the ranges for appliances with one or more rated voltage ranges, unless		N/A
	the rated power input is related to the arithmetic mean value		N/A
	For appliances with two means of connection to the supply, the permitted deviation for power input specified in Table 1 measured separately for each circuit (IEC 60335-2-17)		N/A
10.2	Current at normal operating temperature, rated voltage and normal operation not deviating from rated current by more than shown in table 2..... :		N/A
	Test carried out at upper and lower limits of the ranges for appliances with one or more rated voltage ranges, unless		N/A
	the rated current is related to the arithmetic mean value of the range		N/A
10.101	For PTC heating elements the power input have to decrease if the temperature increase (IEC 60335-2-17)		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
11	HEATING		—
11.1	No excessive temperatures in normal use		P
11.2	The appliance is held, placed or fixed in position as described :		P
	Underblankets (length less than 1 m), and duvet (not PTC elements) folded (IEC 60335-2-17)		N/A
	Wraps (not PTC elements) folded (IEC 60335-2-17)		N/A
11.3	Temperature rises, other than of windings, determined by thermocouples		P
	Temperature rises of windings determined by resistance method, unless		N/A
	the windings are non-uniform or it is difficult to make the necessary connections		N/A
	Thermocouples are attached with textile thread over a length at least 10 mm (heating elements) (IEC 60335-2-17)		P
	Thermocouples are attached to brass or copper plates coated with insulating lacquer (electro-conductive textiles) (IEC 60335-2-17)		N/A
	Thermocouples are soldered to plates of copper (pads) (IEC 60335-2-17)		N/A
11.4	Heating appliances operated under normal operation at 1.15 times rated power input (W) :		N/A
	Supply voltage (V) between 0,94 and 1,06 times rated voltage (controlled appliances and class III construction) (IEC 60335-2-17)	Controlled appliance	P
11.5	Motor-operated appliances operated under normal operation at most unfavourable voltage between 0.94 and 1.06 times rated voltage (V) :		N/A
11.6	Combined appliances operated under normal operation at most unfavourable voltage between 0.94 and 1.06 times rated voltage (V) :		N/A
11.7	Appliances are operated until steady conditions are established (IEC 60335-2-17)		P
11.8	Temperature rises monitored continuously and not exceeding the values in table 3 :	(see appended table)	P
	If the temperature rise of a motor winding exceeds the value of table 3, or		N/A
	if there is doubt with regard to classification of insulation,		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	tests of Annex C are carried out		N/A
	Sealing compound does not flow out		P
	Protective devices do not operate, except		P
	components in protective electronic circuits tested for the number of cycles specified in 24.1.4		N/A
	Temperatures not exceeding values in table 101 or table 102 (IEC 60335-2-17)		P
	Flexible part with electro-conductive textile, values specified for heating elements applicable to the surface of the material (IEC 60335-2-17)	No such components	N/A
	Temperature or temperature rise specified for the surface applies to the accessible surface of the sheath (pads with ends of heating element contained in a plastic sheath attached to the flexible part) (IEC 60335-2-17)		P
11.101	No risk of heatstroke to the user (blankets/mattresses) (IEC 60335-2-17)		N/A
	Blanket/mattress surface temperature controllable down to 60 °C or less, during the first hour of operation, and thereafter (IEC 60335-2-17)		N/A
	45 °C, nearest the foot end of the bed (IEC 60335-2-17)		N/A
	37°C, remainder of the flexible part (IEC 60335-2-17)		N/A
	Other appliances surface temperature rise controllable down to 33 K or less, during the first hour of operation, and thereafter (IEC 60335-2-17)		N/A
	28 K, nearest the foot end of the bed (IEC 60335-2-17)		N/A
	20 K, remainder of the flexible part (IEC 60335-2-17)		N/A
11.102	No excessive surface temperature (pads) (IEC 60335-2-17)		P
	Controlled pads, surface temperature controllable down to 85 °C or less (IEC 60335-2-17)	(see appended table)	P
	other pads, surface temperature not exceed 60 K (IEC 60335-2-17)		N/A
13	LEAKAGE CURRENT AND ELECTRIC STRENGTH AT OPERATING TEMPERATURE		—
13.1	Leakage current not excessive and electric strength adequate		P

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	Heating appliances operated at 1.15 times the rated power input (W)..... :		N/A
	Motor-operated appliances and combined appliances supplied at 1.06 times the rated voltage (V)..... :	Controlled appliance	P
	Load of 35 kg/m ² is placed on the top sheet (IEC 60335-2-17)		N/A
	Protective impedance and radio interference filters disconnected before carrying out the tests		N/A
13.2	For class 0, class II and class III appliances, leakage current measured by means of the circuit described in figure 4 of IEC 60990	class II appliances	P
	For other appliances, a low impedance ammeter may be used		N/A
	For flexible part, leakage current measured between any pole of the supply and the sheets of metal foil (IEC 60335-2-17)		P
	Pads 0,5 mA (IEC 60335-2-17)		N/A
	Blankets and mattresses 1 mA/m ² with max 2,5 mA (IEC 60335-2-17)		P
	Leakage current measurements..... :	(see appended table)	P
13.3	The appliance is disconnected from the supply		P
	Electric strength tests according to table 4 :	(see appended table)	P
	For flexible part, test applied between live parts and the sheets of metal foil (IEC 60335-2-17)		P
	No breakdown during the tests	No breakdown	P
14	TRANSIENT OVERVOLTAGES		—
	Appliances withstand the transient over-voltages to which they may be subjected		N/A
	Clearances having a value less than specified in table 16 subjected to an impulse voltage test, the test voltage specified in table 6 :		N/A
	No flashover during the test, unless		N/A
	of functional insulation if the appliance complies with clause 19 with the clearance short-circuited		N/A
15	MOISTURE RESISTANCE		—
15.1	Enclosure provides the degree of moisture protection according to classification of the appliance		P

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	Compliance checked as specified in 15.1.1, taking into account 15.1.2, followed by the electric strength test of 16.3		N/A
	No trace of water on insulation which can result in a reduction of clearances or creepage distances below values specified in clause 29		N/A
	Class III appliances and Class III constructions, tests not applicable (IEC 60335-2-17)		N/A
15.1.1	Appliances, other than IPX0, subjected to tests as specified in IEC 60529 :	IPX0	N/A
	Water valves containing live parts in external hoses for connection of an appliance to the water mains tested as specified for IPX7 appliances		N/A
15.1.2	Hand-held appliance turned continuously through the most unfavourable positions during the test		N/A
	Built-in appliances installed according to the instructions		N/A
	Appliances placed or used on the floor or table placed on a horizontal unperforated support		N/A
	Appliances normally fixed to a wall and appliances with pins for insertion into socket-outlets are mounted on a wooden board		N/A
	For IPX3 appliances, the base of wall mounted appliances is placed at the same level as the pivot axis of the oscillating tube		N/A
	For IPX4 appliances, the horizontal centre line of the appliance is aligned with the pivot axis of the oscillating tube, and		N/A
	for appliances normally used on the floor or table, the movement is limited to two times 90° for a period of 5 min, the support being placed at the level of the pivot axis of the oscillating tube		N/A
	Wall-mounted appliances, take into account the distance to the floor stated in the instructions		N/A
	Appliances normally fixed to a ceiling are mounted underneath a horizontal unperforated support, the pivot axis of the oscillating tube located at the level of the underside of the support, and		N/A
	for IPX4 appliances, the movement of the tube is limited to two times 90° from the vertical for a period of 5 min		N/A
	Appliances with type X attachment fitted with a flexible cord as described		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	Detachable parts subjected to the relevant treatment with the main part		N/A
	However, if a part has to be removed for user maintenance and a tool is needed, this part is not removed		N/A
15.2	Spillage of liquid does not affect the electrical insulation		N/A
	Appliances with type X attachment fitted with a flexible cord as described		N/A
	Appliances incorporating an appliance inlet tested with or without an connector, whichever is most unfavourable		N/A
	Detachable parts are removed		N/A
	Overfilling test with additional amount of water, over a period of 1 min (l)..... :		N/A
	The appliance withstands the electric strength test of 16.3		N/A
	No trace of water on insulation that can result in a reduction of clearances or creepage distances below values specified in clause 29		N/A
15.3	Appliances proof against humid conditions		P
	Checked by test Cab: Damp heat steady state in IEC 60068-2-78		P
	Detachable parts removed and subjected, if necessary, to the humidity test with the main part		N/A
	Humidity test for 48 h in a humidity cabinet	25 °C, 93 %, 48 h	P
	Reassembly of those parts that may have been removed		N/A
	The appliance withstands the tests of clause 16		P
	Flexible part not subjected to the test (IEC 60335-2-17)		P
15.101	Washable appliances are laundered according to instruction (IEC 60335-2-17)	No washable appliances	N/A
	Immersion test for 1 hour and then cl. 16 apply and no water on insulation specified in cl. 29 (IEC 60335-2-17)		N/A
	Moisture-proof appliances, water not in contact with heating elements and other current-carrying parts (IEC 60335-2-17)		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	Washable appliances fitted with a non-detachable flexible cord, switch or control unit withstands the electric strength test of 16.3 and no water on insulation specified in cl. 29 (IEC 60335-2-17)		N/A
15.102	Incision on permanent enclosure (IEC 60335-2-17)		N/A
	Immersion test for 1 hour and then cl. 16 apply and no water on insulation specified in cl. 29 (IEC 60335-2-17)		N/A
15.103	Mattress wetted with quantity (l) of saline (IEC 60335-2-17) :		P
	Withstand electric strength and inspection (flexible part) (IEC 60335-2-17)		P
16	LEAKAGE CURRENT AND ELECTRIC STRENGTH		—
16.1	Leakage current not excessive and electric strength adequate		P
	Protective impedance disconnected from live parts before carrying out the tests		N/A
	Tests carried out at room temperature and not connected to the supply		P
	Class III appliances and Class III constructions, tests not applicable (IEC 60335-2-17)		N/A
16.2	Single-phase appliances: test voltage 1.06 times rated voltage (V)..... :	106 V	P
	Three-phase appliances: test voltage 1.06 times rated voltage divided by $\sqrt{3}$ (V)..... :		N/A
	Leakage current measurements..... :	(see appended table)	P
	For flexible part of blankets and pads, voltage applied between live parts and an electrode immersed in the saline solution (IEC 60335-2-17)		P
	Flexible part of mattresses, covered with metal foil (IEC 60335-2-17)		N/A
	Limit values doubled if:		—
	- all controls have an off position in all poles, or		N/A
	- the appliance has no control other than a thermal cut-out, or		N/A
	- all thermostats, temperature limiters and energy regulators do not have an off position, or		N/A
	- the appliance has radio interference filters		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	With the radio interference filters disconnected, the leakage current do not exceed limits specified :		N/A
16.3	Electric strength tests according to table 7 :	(see appended table)	P
	Test voltage applied between the supply cord and inlet bushing and cord guard and cord anchorage as specified..... :		P
	No breakdown during the tests	No breakdown	P
	For flexible part of blankets and pads, voltage applied between live parts and an electrode immersed in the saline solution (IEC 60335-2-17)		P
	However, when the test is carried out on blankets and pads without first carrying out the tests of clause 15, the flexible part is covered with metal foil instead (IEC 60335-2-17)		N/A
	After the test, flexible part of blankets and pads rinsed in water (IEC 60335-2-17)		P
	Mattresses rinsed in water (IEC 60335-2-17)		N/A
17	OVERLOAD PROTECTION OF TRANSFORMERS AND ASSOCIATED CIRCUITS		—
	No excessive temperatures in transformer or associated circuits in event of short-circuits likely to occur in normal use :	No such parts	N/A
	Appliance supplied with 1.06 or 0.94 times rated voltage under the most unfavourable short-circuit or overload likely to occur in normal use (V) :		N/A
	Basic insulation is not short-circuited		N/A
	Temperature rise of insulation of the conductors of safety extra-low voltage circuits not exceeding the relevant value specified in table 3 by more than 15 K		N/A
	Temperature of the winding not exceeding the value specified in table 8		N/A
	However, limits do not apply to fail-safe transformers complying with sub-clause 15.5 of IEC 61558-1		N/A
18	ENDURANCE		—
	Requirements and tests are specified in part 2 when necessary		N/A
19	ABNORMAL OPERATION		—
19.1	The risk of fire, mechanical damage or electric shock under abnormal or careless operation obviated		P

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	Electronic circuits so designed and applied that a fault will not render the appliance unsafe :		P
	Blankets subjected to the tests of 19.102 and 19.108 (IEC 60335-2-17)		N/A
	Pads subjected to the tests of 19.108, and 19.110 (IEC 60335-2-17)		P
	Controlled pads also subjected to the tests of 19.109 (IEC 60335-2-17)		N/A
	Mattresses subjected to the tests of 19.108 and 19.113 (IEC 60335-2-17)		N/A
	Appliances incorporating a fuse-link or intentionally weak part that ruptures due to a short circuit also subjected to the test of 19.107 (IEC 60335-2-17)		N/A
	Fuse-links incorporated in an appliance to protect the flexible part against overheating or ignition not subjected to the tests of 19.12 (IEC 60335-2-17)		N/A
	Appliances incorporating electronic circuits also subjected to the tests of 19.11 and 19.12 (IEC 60335-2-17)		P
	Appliance supplied with a voltage (IEC 60335-2-17)		—
	– between 0,9 times and 1,1 times the rated voltage, for controlled appliances.....:		P
	– resulting in a power input between 0,85 times and 1,24 times the rated power input, for other appliances,.....:		N/A
	unless otherwise specified		N/A
19.11	Electronic circuits, compliance checked by evaluation of the fault conditions specified in 19.11.2 for all circuits or parts of circuits, unless		P
	they comply with the conditions specified in 19.11.1		N/A
	Appliances incorporating an electronic circuit that relies upon a programmable component to function correctly, subjected to the test of 19.11.4.8, unless		N/A
	restarting does not result in a hazard		P
	Appliances having a device with an off position obtained by electronic disconnection, or a device placing the appliance in a stand-by mode, subjected to the tests of 19.11.4		N/A
	If the safety of the appliance under any of the fault conditions depends on the operation of a miniature fuse-link complying with IEC 60127, the test of 19.12 is carried out		P

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	During and after each test the following is checked:		—
	- the temperature of the windings do not exceed the values specified in table 8		P
	- the appliance complies with the conditions specified in 19.13		P
	- any current flowing through protective impedance not exceeding the limits specified in 8.1.4		N/A
	If a conductor of a printed board becomes open-circuited, the appliance is considered to have withstood the particular test, provided both of the following conditions are met:		—
	- the base material of the printed circuit board withstands the test of Annex E		N/A
	- any loosened conductor does not reduce clearance or creepage distances between live parts and accessible metal parts below the values specified in clause 29		N/A
19.11.1	Fault conditions a) to g) in 19.11.2 are not applied to circuits or parts of circuits meeting both of the following conditions:		—
	- the electronic circuit is a low-power circuit, that is, the maximum power at low-power points does not exceed 15 W according to the tests specified		N/A
	- the protection against electric shock, fire hazard, mechanical hazard or dangerous malfunction of other parts of the appliance does not rely on the correct functioning of the electronic circuit		N/A
19.11.2	Fault conditions applied one at a time, the appliance operating under conditions specified in clause 11, but supplied at rated voltage, duration of the tests as specified:		—
	a) short circuit of functional insulation if clearances or creepage distances are less than the values specified in clause 29		P
	b) open circuit at the terminals of any component		P
	c) short circuit of capacitors, unless		P
	they comply with IEC 60384-14		P
	d) short circuit of any two terminals of an electronic component, other than integrated circuits		P
	This fault condition is not applied between the two circuits of an optocoupler		P
	e) failure of triacs in the diode mode		P
	f) failure of microprocessors and integrated circuits		N/A
	g) failure of an electronic power switching device		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	Each low power circuit is short-circuited by connecting the low-power point to the pole of the supply source from which the measurements were made		N/A
19.11.3	If the appliance incorporates a protective electronic circuit which operates to ensure compliance with clause 19, the relevant test is repeated with a single fault simulated, as indicated in a) to g) of 19.11.2		N/A
	The test of 19.11.1 is not repeated (IEC 60335-2-17)		N/A
19.11.4	Appliances having a device with an off position obtained by electronic disconnection, or		N/A
	a device that can be placed in the stand-by mode,		N/A
	subjected to the tests of 19.11.4.1 to 19.11.4.7, the device being set in the off position or in the stand-by mode		N/A
	Appliances incorporating a protective electronic circuit subjected to the tests of 19.11.4.1 to 19.11.4.7, the tests being carried out after the protective electronic circuit has operated, except that		N/A
	appliances operated for 30 s or 5 min during the test of 19.7 are not subjected to the tests for electromagnetic phenomena.		N/A
	Surge protective devices disconnected, unless		N/A
	They incorporate spark gaps		N/A
19.11.4.1	The appliance is subjected to electrostatic discharges in accordance with IEC 61000-4-2, test level 4		N/A
19.11.4.2	The appliance is subjected to radiated fields in accordance with IEC 61000-4-3, test level 3		N/A
19.11.4.3	The appliance is subjected to fast transient bursts in accordance with IEC 61000-4-4, test level 3 or 4 as specified		N/A
19.11.4.4	The power supply terminals of the appliance subjected to voltage surges in accordance with IEC 61000-4-5, test level 3 or 4 as specified		N/A
	Earthed heating elements in class I appliances disconnected		N/A
19.11.4.5	The appliance is subjected to injected currents in accordance with IEC 61000-4-6, test level 3		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
19.11.4.6	Appliances having a rated current not exceeding 16 A are subjected to the Class 3 voltage dips and interruptions in accordance with IEC 61000-4-11		N/A
	Appliances having a rated current exceeding 16 A are subjected to the Class 3 voltage dips and interruptions in accordance with IEC 61000-4-34		N/A
19.11.4.7	The appliance is subjected to mains signals in accordance with IEC 61000-4-13, test level class 2		N/A
19.11.4.8	The appliance is supplied at rated voltage and operated under normal operation. After 60s the power supply is reduced to a level such that the appliance ceases to respond or parts controlled by the programmable component cease to operate		N/A
	The appliance continues to operate normally, or		N/A
	requires a manual operation to restart		N/A
19.12	If the safety of the appliance for any of the fault conditions specified in 19.11.2 depends on the operation of a miniature fuse-link complying with IEC 60127, the test is repeated, measuring the current flowing through the fuse-link; measured current (A); rated current of the fuse-link (A)..... :	Measured current > 20 A, Rated current of the fuse-link: 6.3 A	P
19.13	During the tests the appliance does not emit flames, molten metal, poisonous or ignitable gas in hazardous amounts		P
	Temperature rises not exceeding the values shown in table 9 :	(see appended table)	P
	Compliance with clause 8 not impaired		P
	If the appliance can still be operated it complies with 20.2		P
	Test of 15.101 is carried out before the test of 16.3 (IEC 60335-2-17)		N/A
	Insulation, other than of class III appliances or class III constructions that do not contain live parts, withstands the electric strength test of 16.3, the test voltage as specified in table 4:		—
	- basic insulation (V) :		N/A
	- supplementary insulation (V) :		N/A
	- reinforced insulation (V) :	3000 V	P
	After operation or interruption of a control, clearances and creepage distances across the functional insulation withstand the electric strength test of 16.3, the test voltage being twice the working voltage		P

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	The appliance does not undergo a dangerous malfunction, and		P
	no failure of protective electronic circuits, if the appliance is still operable		N/A
	Appliances tested with an electronic switch in the off position, or in the stand-by mode:		—
	- do not become operational, or		N/A
	- if they become operational, do not result in a dangerous malfunction during or after the tests of 19.11.4		N/A
	Failure of an electronic switch in the off position or stand-by mode and the appliance becomes permanently energized, the temperatures or temperature rises specified in 19.111 not exceeded (IEC 60335-2-17)		N/A
	If the appliance contains lids or doors that are controlled by one or more interlocks, one of the interlocks may be released provided that:		—
	- the lid or door does not move automatically to an open position when the interlock is released, and		N/A
	- the appliance does not start after the cycle in which the interlock was released		N/A
	Flexible part in contact thermal insulation: (IEC 60335-2-17)		—
	165 °C (160 °C) controlled appliance	(see appended table)	P
	150 K (145 K) other appliance		N/A
	Heating elements or electro-conductive textiles: (IEC 60335-2-17)		—
	160 °C for controlled appliances	(see appended table)	P
	145 K for other appliances		N/A
	unless the appliance is no longer in an operating condition		N/A
19.14	Appliances operated under the conditions of clause 11, any contactor or relay contact operating under the conditions of clause 11 being short-circuited	No such components	N/A
	For a relay or contactor with more than one contact, all contacts are short-circuited at the same time		N/A
	A relay or contactor operating only to ensure the appliance is energized for normal use is not short-circuited		N/A
	If more than one relay or contactor operates in clause 11, they are short-circuited in turn		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
19.15	For appliances with a mains voltage selector switch, the switch is set to the lowest rated voltage position and the highest value of rated voltage is applied	No voltage selector	N/A
19.101	Void		N/A
19.102	Blankets, five-thickness fold (IEC 60335-2-17)		N/A
	If the blanket cannot be folded with five thicknesses, tested as a mattress (IEC 60335-2-17)		N/A
	Appliance supplied with a voltage at the upper limit of the range specified in 19.1.....: (IEC 60335-2-17)		N/A
19.103	Void (IEC 60335-2-17)		N/A
19.104	Void (IEC 60335-2-17)		N/A
19.105	Void (IEC 60335-2-17)		N/A
19.106	Void (IEC 60335-2-17)		N/A
19.107	Tests of 19.102, 19.110 and 19.113 repeated with the point of maximum impedance of the protection circuit included in the most unfavourable part (IEC 60335-2-17)	Not depends on the fuse-link	N/A
	Appliance supplied with a voltage at the lower limit of the range specified in 19.1.....: (IEC 60335-2-17)		N/A
19.108	Appliances with controls that limit the temperature during the test of Clause 11 short-circuited (IEC 60335-2-17)		P
19.109	Controlled pads tested with two-thirds of flexible part positioned so that it overhangs the edge of the plywood support (IEC 60335-2-17)		P
19.110	Pads, 3-thickness fold (IEC 60335-2-17)		P
19.111	Blankets and mattresses, test of 11.101 repeated with simulated single component failure (IEC 60335-2-17)		N/A
	Inherently controlled blankets and mattresses, max. surface temperature does not exceed 60 °C (IEC 60335-2-17)		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	Other blankets and mattresses, max. surface temperature rise does not exceed 43 K (IEC 60335-2-17)		N/A
	Pads operated under normal condition with control adjusted for continuous use with simulated single component failure. (IEC 60335-2-17)		P
	Inherently controlled pads, max. surface temperature does not exceed 85 °C (IEC 60335-2-17)		P
	Other pads, max. surface temperature rise does not exceed 60 K (IEC 60335-2-17)		N/A
19.112	Heating elements and internal wiring do not attain excessive temperature if a strand or strands are broken (tests 19.112.1-19.112.3) (IEC 60335-2-17)		N/A
19.112.1	Test of internal wiring/heating elements without integral insulation, having individual strands not insulated from each other (IEC 60335-2-17)		N/A
	Number of strands left intact for the test; number of strands:		N/A
	No scorching of enclosure or material in contact		N/A
19.112.2	Test of internal wiring/heating elements without integral insulation, having individual strands not insulated from each other (IEC 60335-2-17)		N/A
	Number of strands left intact for the test; number of strands:		N/A
	No scorching of enclosure or material in contact		N/A
19.112.3	Test of internal wiring/heating elements having individual strands which are electrically insulated from each other (IEC 60335-2-17)		N/A
	Measured insulation resistance (MΩ) at 500 V d.c. between any two strands:		N/A
	0,1 MΩ min. (Class III appliances)		N/A
	1 MΩ min. (for other appliances)		N/A
19.113	Mattresses, five runs of the heating element bunched together in the most unfavourable way over a length of 150 mm (IEC 60335-2-17)		N/A
	If the construction does not allow the heating element runs to be bunched together, the heating element assembly removed from the mattress and subjected to the test of 19.102 (IEC 60335-2-17)		N/A
20	STABILITY AND MECHANICAL HAZARDS		—

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
20.1	Appliances having adequate stability		P
	Tilting test through an angle of 10°, appliance placed on an inclined plane/horizontal support, not connected to the supply mains; appliance does not overturn		P
	Tilting test repeated on appliances with heating elements, angle of inclination increased to 15°		P
	Possible heating test in overturned position; temperature rise does not exceed values shown in table 9		N/A
	The test is only applied to control units intended to be placed on a surface (IEC 60335-2-17)		P
20.2	Moving parts adequately arranged or enclosed as to provide protection against personal injury	No moving parts	N/A
	Protective enclosures, guards and similar parts are non-detachable, and		N/A
	have adequate mechanical strength		N/A
	Enclosures that can be opened by overriding an interlock are considered to be detachable parts		N/A
	Self-resetting thermal cut-outs and overcurrent protective devices not causing a hazard by unexpected closure		N/A
	Not possible to touch dangerous moving parts with the test probe described		N/A
21	MECHANICAL STRENGTH		—
21.1	Appliance has adequate mechanical strength and is constructed as to withstand rough handling		P
	Checked by applying 3 blows to every point of the enclosure like to be weak, in accordance with test Ehb of IEC 60068-2-75, spring hammer test, with an impact energy of 0,5 J		P
	The appliance shows no damage impairing compliance with this standard, and	No crack and no damaged	P
	compliance with 8.1, 15.1 and clause 29 not impaired		P
	If doubt, supplementary or reinforced insulation subjected to the electric strength test of 16.3		N/A
	If necessary, repetition of groups of three blows on a new sample		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	Flexible parts do not show: (IEC 60335-2-17)		—
	- damage between electrodes and electro-conductive textile or between electrodes and their connections		N/A
	- that the enclosure is cracked or torn if it provides electrical insulation or protection against moisture		N/A
	- that the heating element has moved in the channels so that two runs come into contact with each other		N/A
	- breakage of any conductive thread of electro-conductive textiles		N/A
	- breakage of conductors of heating element		N/A
	- breakage more than 10% of strands of internal wiring		N/A
	- failure of constructional stitching or breakage of glued or welded joints		N/A
	- loosening of non-detachable flexible cord from the flexible part		N/A
	- loosening or breakage of electrical connections		N/A
	- open-circuiting of controls in flexible part		N/A
21.2	Accessible parts of solid insulation having strength to prevent penetration by sharp implements		N/A
	Test not applicable if the thickness of supplementary insulation is at least 1 mm and reinforced insulation at least 2 mm		N/A
	The insulation is tested as specified, and does withstand the electric strength test of 16.3		N/A
	Not applicable to flexible parts (IEC 60335-2-17)		N/A
	except those incorporating electro-conductive textile having a working voltage above 24 V (IEC 60335-2-17)		N/A
21.101	Control units subjected to prescribed drop tests (IEC 60335-2-17)		—
	No damage after test		N/A
	Repeat of test Cl. 11. (if applicable)		N/A
21.102	Blanket rotated 2000 times on machine described in Annex BB (IEC 60335-2-17)		N/A
21.103	Pads subjected to 4000 cycles of specified flexing test (force N) applied to attached end (IEC 60335-2-17) :		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
21.104	Mattress subjected to 1000 cycles with prescribed roller (IEC 60335-2-17)		N/A
21.105	Measured surface temperature of flexible part (inherently controlled appliance) (IEC 60335-2-17)		N/A
	Temperature (°C) at beginning of test.....: (IEC 60335-2-17)		N/A
	Temperature (°C) at end of test.....: (IEC 60335-2-17)		N/A
	Temperature difference (K) (limit 5 K max.).....: (IEC 60335-2-17)		N/A
	PTC heating elements covered with 90 mm thick of thermal insulation (IEC 60335-2-17)		N/A
	Temperature (°C) after 100 h.....: (IEC 60335-2-17)		N/A
	Temperature (°C) at the end of the test.....: (IEC 60335-2-17)		N/A
	Temperature difference (K) (limit 5 K max.).....: (IEC 60335-2-17)		N/A
21.106	For blankets test of 21.102 repeated with other face in contact (IEC 60335-2-17)		N/A
	For pads, test of 21.103 repeated with other face adjacent to roller (IEC 60335-2-17)		N/A
	For mattresses test of 21.104 repeated in direction of minor axis (IEC 60335-2-17)		N/A
21.107	Pad rotated 500 revs. in tumbling barrel shown in fig.109 (IEC 60335-2-17)		N/A
21.108	Tests on enclosures of bonded construction (IEC 60335-2-17)		—
	Specimens cut from sample A:		N/A
	- in direction of element runs, at 20 °C		N/A
	- in direction of element runs, at 80 °C		N/A
	- perpendicular to element runs, at 20 °C		N/A
	- perpendicular to element runs, at 80 °C		N/A
	Specimens cut from new sample:		—
	- in direction of element runs, at 20 °C		N/A
	- in direction of element runs, at 80 °C		N/A
	- perpendicular to element runs, at 20 °C		N/A
	- perpendicular to element runs, at 80 °C		N/A
	None of the layers separated		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
21.109	Tests on enclosure of moisture-proof pads consisting of unsupported flexible plastic sheeting at -20 °C (IEC 60335-2-17)		N/A
	Number of samples breaking into separate pieces (2 max.) out of the 10 samples		N/A
21.110	The enclosure has adequate resistance to tearing (moisture-proof pads only) (IEC 60335-2-17)	No moisture-proof	N/A
	Enclosures of unsupported vinyl plastic sheeting test of 21.110.1 (IEC 60335-2-17)		N/A
	Enclosures of rubberised and similar treated fabrics tests of 21.110.2 to 21.110.4 (IEC 60335-2-17)		N/A
	Enclosure of sewn fabric conformity tested also with 21.110.5 (IEC 60335-2-17)		N/A
21.110.1	Test of unsupported flexible plastic sheeting, 5 samples shaped as shown in fig. 111: (IEC 60335-2-17)		—
	- breaking load in N (N) :	1 - 2 - 3 - 4 - 5 -	N/A
	- average (N) (limit not less than 12,5 N) :		N/A
21.110.2	Test on 3 samples of rubberised or similar treated fabric (limit not less than 410kPa): (IEC 60335-2-17)		—
	- pressure in kPa (kPa) :	1 - 2 - 3 -	N/A
	- average (kPa) (limit not less than 490kPa):		N/A
21.110.3	3 sets of samples conditioned and tested as specified in 21.110.2 (IEC 60335-2-17)		—
	Set 1, 1h immersion in boiling water, plus 1000 h at 100 °C:		—
	- pressure in kPa (kPa) :	1 - 2 - 3 -	N/A
	- average in kPa (kPa) :		N/A
	- average (kPa) (limit 70% of result for 21.110.2 min) :		N/A
	Second set of samples after 168 h in oxygen bomb:		—
	- pressure in kPa (kPa) :	1 - 2 - 3 -	N/A
	- average in kPa (kPa) :		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	- average (kPa) (limit 70% of result for 21.110.2 min) :		N/A
	Third set of samples after 20 h in air bomb:		—
	- pressure in kPa (kPa) :	1 - 2 - 3 -	N/A
	- average in kPa (kPa) :		N/A
	- average (kPa) (limit 70% of result for 21.110.2 min) :		N/A
21.110.4	Specified conditioning and folding test carried out (IEC 60335-2-17)		N/A
	Samples show no cracks, hard spots or other evidence of deterioration		N/A
21.110.5	20 samples of seamed fabric conditioned and tested as specified (IEC 60335-2-17)		—
	Set 1 (100 °C immersion and heating):		—
	- force in N per metre length (N/m) :	1 - 2 - 3 - 4 - 5 -	N/A
	- average (N/m) :		N/A
	Set 2 (oxygen bomb):		—
	- force in N per metre length (N/m) :	1 - 2 - 3 - 4 - 5 -	N/A
	- average (N/m) :		N/A
	Set 3 (air bomb):		—
	- force in N per metre length (N/m) :	1 - 2 - 3 - 4 - 5 -	N/A
	- average (N/m) :		N/A
	Set 4 (no conditioning):		—
	- force in N per metre length (N/m) :	1 - 2 - 3 - 4 - 5 -	N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	- average (N/m) :		N/A
	Average force for each test not less than 875 N per metre length		N/A
21.111	Plastic coverings of heating element and internal wiring has adequate flexibility and insulating characteristics (test of 21.111.1 and, if applicable, 21.111.2 and 21.111.3) (IEC 60335-2-17)		N/A
	The requirement does not apply to Class III appliances having a rated voltage not exceeding 24 V or (IEC 60335-2-17)		N/A
	to Class III constructions having a working voltage not exceeding 24 V (IEC 60335-2-17)		N/A
	Tests also applied to a sheath that comprises basic insulation over earthed parts (IEC 60335-2-17)		N/A
21.111.1	Sample of heating element/internal wiring completed 25000 cycles on apparatus shown in fig.110 without interruption of the current (IEC 60335-2-17)		N/A
	No increase in input (PTC only)		N/A
	Insulation resistance (MΩ) measured at 500 V d.c. in saline (limit not less than 1 MΩ):		N/A
21.111.2	Test of elongation and tensile strength on plastic coverings exceeding 75 °C (50 K) during test of Cl. 11 or 135 °C (110 K) during test of Cl. 19 (IEC 60335-2-17)		N/A
	Elongation (%), unconditioned :		N/A
	Elongation (%), conditioned :		N/A
	Tensile strength (Mpa), unconditioned :		N/A
	Tensile strength (Mpa), conditioned :		N/A
21.111.3	Test for flexibility of plastic coverings subjected to the test of 21.111.2 (IEC 60335-2-17)		N/A
	Electric strength test (1000 V) (IEC 60335-2-17)		N/A
	No cracks visible to the naked eye (IEC 60335-2-17)		N/A
21.112	PTC heating elements resistant to crushing increase temperature less than 10 K (IEC 60335-2-17)	No PTC heating elements	N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
21.113	Insulation of flexible parts incorporating electro-conductive textile retains adequate flexibility and insulating characteristics throughout the life of the appliance (IEC 60335-2-17)	No such parts	N/A
	Requirement does not apply to Class III appliances having a rated voltage not exceeding 24 V or (IEC 60335-2-17)		N/A
	to Class III constructions having a working voltage not exceeding 24 V (IEC 60335-2-17)		N/A
22	CONSTRUCTION		—
22.1	Appliance marked with the first numeral of the IP system, relevant requirements of IEC 60529 are fulfilled	IPX0	N/A
22.2	Stationary appliance: means to ensure all-pole disconnection from the supply being provided:		—
	- a supply cord fitted with a plug, or	Supply cord with plug	P
	- a switch complying with 24.3, or		N/A
	- a statement in the instruction sheet that a disconnection incorporated in the fixed wiring is to be provided, or		N/A
	- an appliance inlet		N/A
	Singe-pole switches and single-pole protective devices for the disconnection of heating elements in single-phase, permanently connected class 01 and class I appliances, connected to the phase conductor		N/A
22.3	Appliance provided with pins: no undue strain on socket-outlets		N/A
	Applied torque not exceeding 0.25 Nm		N/A
	Pull force of 50N to each pin after the appliance has being placed in the heating cabinet; when cooled to room temperature the pins are not displaced by more than 1mm		N/A
	Each pin subjected to a torque of 0.4Nm; the pins are not rotating, unless		N/A
	rotating does not impair compliance with this standard		N/A
22.4	Appliance for heating liquids and appliance causing undue vibration not provided with pins for insertion into socket-outlets		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
22.5	No risk of electric shock when touching the pins of the plug, for appliances having a capacitor with rated capacitance exceeding 0,1 μ F, the appliance being disconnected from the supply at the instant of voltage peak	0.53 nF	N/A
	Voltage not exceeding 34 V (V)..... :		N/A
22.6	Electrical insulation not affected by condensing water or leaking liquid	No leakage contained	N/A
	Electrical insulation of Class II appliances not affected if a hose ruptures or seal leaks		N/A
	In case of doubt, test as described		N/A
22.7	Adequate safeguards against the risk of excessive pressure in appliances containing liquid or gases or having steam-producing devices		P
22.8	Electrical connections not subject to pulling during cleaning of compartments to which access can be gained without the aid of a tool, and that are likely to be cleaned in normal use		N/A
22.9	Insulation, internal wiring, windings, commutators and slip rings not exposed to oil, grease or similar substances, unless		N/A
	the substance has adequate insulating properties		N/A
22.10	Not possible to reset voltage-maintained non-self-resetting thermal cut-outs by the operation of an automatic switching device incorporated within the appliance, if:		N/A
	- a non-self-resetting thermal cut-out is required by the standard, and		N/A
	- a voltage maintained non-self-resetting thermal cut-out is used to meet it		N/A
	Non-self-resetting thermal motor protectors have a trip-free action, unless		N/A
	they are voltage maintained		N/A
	Reset buttons of non-self-resetting controls so located or protected that accidental resetting is unlikely		N/A
22.11	Reliable fixing of non-detachable parts that provide the necessary degree of protection against electric shock, moisture or contact with moving parts		P
	Obvious locked position of snap-in devices used for fixing such parts	No snap-in devices	N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	No deterioration of the fixing properties of snap-in devices used in parts that are likely to be removed during installation or servicing		N/A
	Tests as described		N/A
22.12	Handles, knobs etc. fixed in a reliable manner		P
	Fixing in wrong position of handles, knobs etc. indicating position of switches or similar components not possible		P
	Axial force 15 N applied to parts, the shape being so that an axial pull is unlikely to be applied		P
	Axial force 30 N applied to parts, the shape being so that an axial pull is likely to be applied		N/A
22.13	Unlikely that handles, when gripped as in normal use, make the operator's hand touch parts having a temperature rise exceeding the value specified for handles which are held for short periods only		N/A
22.14	No ragged or sharp edges creating a hazard for the user in normal use, or during user maintenance		N/A
	No exposed pointed ends of self-tapping screws or other fasteners, likely to be touched by the user in normal use or during user maintenance		N/A
22.15	Storage hooks and the like for flexible cords smooth and well rounded	Rounded and smooth	P
22.16	Automatic cord reels cause no undue abrasion or damage to the sheath of the flexible cord, no breakage of conductors strands and no undue wear of contacts		P
	Cord reel tested with 6000 operations, as specified		N/A
	Electric strength test of 16.3, voltage of 1000 V applied	No automatic cord reels	N/A
22.17	Spacers not removable from the outside by hand or by means of a screwdriver or a spanner		N/A
22.18	Current-carrying parts and other metal parts resistant to corrosion		N/A
22.19	Driving belts not relied upon to provide the required level of insulation, unless	No driving belts	N/A
	constructed to prevent inappropriate replacement		N/A
22.20	Direct contact between live parts and thermal insulation effectively prevented, unless		N/A
	material used is non-corrosive, non-hygroscopic and non-combustible		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
22.21	Wood, cotton, silk, ordinary paper and fibrous or hygroscopic material not used as insulation, unless	No such materials	P
	impregnated		N/A
	This requirement does not apply to magnesium oxide and mineral ceramic fibres used for the electrical insulation of heating elements		N/A
22.22	Appliances not containing asbestos	No asbestos	P
22.23	Oils containing polychlorinated biphenyl (PCB) not used	No oils	P
22.24	Bare heating elements, except in class III appliances or class III constructions that do not contain live parts, adequately supported	No bare heating elements	N/A
	In case of rupture, the heating conductor is unlikely to come in contact with accessible metal parts		N/A
22.25	Sagging heating conductors, except in class III appliances or class III constructions that do not contain live parts, cannot come into contact with accessible metal parts		P
22.26	For class III constructions the insulation between parts operating at safety extra-low voltage and other live parts complies with the requirements for double or reinforced insulation		N/A
	Parts of Class III construction with a working voltage not exceeding 24 V (IEC 60335-2-17)		N/A
22.27	Parts connected by protective impedance separated by double or reinforced insulation		N/A
22.28	Metal parts of Class II appliances conductively connected to gas pipes or in contact with water, separated from live parts by double or reinforced insulation		N/A
22.29	Class II appliances permanently connected to fixed wiring so constructed that the required degree of access to live parts is maintained after installation	No permanently connection	N/A
22.30	Parts serving as supplementary or reinforced insulation fixed so that they cannot be removed without being seriously damaged, or		P
	so constructed that they cannot be replaced in an incorrect position, and so that if they are omitted, the appliance is rendered inoperable or manifestly incomplete		P

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
22.31	Neither clearances nor creepage distances over supplementary and reinforced insulation reduced below values specified in clause 29 as a result of wear		P
	Neither clearances nor creepage distances between live parts and accessible parts reduced below values for supplementary insulation if wires, screws etc. become loose		P
22.32	Supplementary and reinforced insulation constructed or protected against pollution so that clearances or creepage distances are not reduced below the values in clause 29		N/A
	Supplementary insulation of natural or synthetic rubber resistant to ageing, or arranged and dimensioned so that creepage distances are not reduced below values specified in 29.2		N/A
	Ceramic material not tightly sintered, similar materials or beads alone not used as supplementary or reinforced insulation		N/A
	Insulating material in which heating conductors are embedded is considered to be basic insulation, not reinforced insulation		N/A
	Oxygen bomb test at 70 °C for 96 h and 16 h at room temperature		N/A
22.33	Conductive liquids that are or may become accessible in normal use and conductive liquids that are in contact with unearthed accessible metal parts are not in direct contact with live parts	No conductive liquids	N/A
	Electrodes not used for heating liquids		N/A
	For class II constructions, conductive liquids that are or may become accessible in normal use and conductive liquids that are in contact with unearthed accessible metal parts, not in direct contact with basic or reinforced insulation, unless		N/A
	the reinforced insulation consists of at least 3 layers		N/A
	For class II constructions, conductive liquids which are in contact with live parts, not in direct contact with reinforced insulation, unless		N/A
	the reinforced insulation consists of at least 3 layers		N/A
	An air layer not used as basic or supplementary insulation in a double insulation system if likely to be bridged by leaking liquid		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
22.34	Shafts of operating knobs, handles, levers etc. not live, unless		N/A
	the shaft is not accessible when the part is removed		N/A
22.35	For other than class III constructions, handles, levers and knobs, held or actuated in normal use, not becoming live in the event of a failure of basic insulation		P
	Such parts being of metal, and their shafts or fixings are likely to become live in the event of a failure of basic insulation, are either adequately covered by insulation material or their accessible parts are separated from their shafts or fixings by supplementary insulation		N/A
	This requirement does not apply to handles, levers and knobs on stationary appliances, other than those of electrical components, provided they are reliably connected to an earthing terminal or earthing contact, or separated from live parts by earthed metal		N/A
	Insulating material covering metal handles, levers and knobs withstand the electric strength test of 16.3 for supplementary insulation		N/A
22.36	For appliances other than class III, handles continuously held in the hand in normal use so constructed that when gripped as in normal use, the operators hand is not likely to touch metal parts, unless	No such parts	N/A
	they are separated from live parts by double or reinforced insulation		N/A
22.37	Capacitors in Class II appliances not connected to accessible metal parts and their casings, if of metal, separated from accessible metal parts by supplementary insulation, unless		P
	the capacitors comply with 22.42		N/A
22.38	Capacitors not connected between the contacts of a thermal cut-out		P
22.39	Lamp holders used only for the connection of lamps	No lamp holders	N/A
22.40	Motor-operated appliances and combined appliances intended to be moved while in operation, or having accessible moving parts, fitted with a switch to control the motor. The actuating member of the switch being easily visible and accessible		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	If the appliance cannot operate continuously, automatically or remotely without giving rise to a hazard, appliances for remote operation being fitted with a switch for stopping the operation. The actuating member of the switch being easily visible and accessible		N/A
22.41	No components, other than lamps, containing mercury	No mercury	P
22.42	Protective impedance consisting of at least two separate components	No protective impedance	N/A
	Values specified in 8.1.4 not exceeded if any one of the components are short-circuited or open-circuited		N/A
	Resistors checked by the test of 14.1 a) in IEC 60065		N/A
	Capacitors checked by the tests for class Y capacitors in IEC 60384-14		N/A
22.43	Appliances adjustable for different voltages, accidental changing of the setting of the voltage unlikely to occur	No adjustable	N/A
22.44	Appliances not having an enclosure that is shaped or decorated like a toy	Does not look like a toy	P
22.45	When air is used as reinforced insulation, clearances not reduced below the values specified in 29.1.3 due to deformation as a result of an external force applied to the enclosure		N/A
22.46	For programmable protective electronic circuits used to ensure compliance with the standard, the software contains measures to control the fault/error conditions in table R.1		N/A
	Software that contains measures to control the fault/error conditions specified in table R.2 is to be specified in parts 2 for particular constructions or to address specific hazards		N/A
	These requirements are not applicable to software used for functional purpose or compliance with clause 11		N/A
22.47	Appliances connected to the water mains withstand the water pressure expected in normal use		N/A
	No leakage from any part, including any inlet water hose		N/A
22.48	Appliances connected to the water mains constructed to prevent backsiphonage of non-potable water	No water mains	N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
22.49	For remote operation, the duration of operation is to be set before the appliance can be started, unless	No remote operation	N/A
	the appliance switches off automatically or can operate continuously without hazard		N/A
22.50	Controls incorporated in the appliance take priority over controls actuated by remote operation		N/A
22.51	There is a control on the appliance manually adjusted to the setting for remote operation before the appliance can be operated in this mode		N/A
	There is a visual indication showing that the appliance is adjusted for remote operation		N/A
	These requirements not necessary on appliances that can operate as follows, without giving rise to a hazard:		—
	- continuously, or		N/A
	- automatically, or		N/A
	- remotely		N/A
22.52	Socket-outlets on appliances accessible to the user in accordance with the socket-outlet system used in the country in which the appliance is sold	No socket-outlet	N/A
22.101	Void (IEC 60335-2-17)		N/A
22.102	Void (IEC 60335-2-17)		N/A
22.103	Heating elements, electro-conductive textiles and internal wiring retained in their intended position (IEC 60335-2-17)		P
	Heating element located so that there are no crossover points (IEC 60335-2-17)	No crossover points	P
	Separate layer of enclosure supporting heating element or electro-conductive textile firmly secured to prevent rucking (IEC 60335-2-17)		P
	No crossing of internal wires or where such unavoidable, additional anchorage to prevent relative movement (IEC 60335-2-17)		P
22.104	Breaking of stitching does not result in significant change in position of heating element or busbar (IEC 60335-2-17)		P
22.105	Thermostats and thermal cut-outs are enclosed in insulating material (IEC 60335-2-17)		P
22.106	Void (IEC 60335-2-17)		N/A
22.107	Void (IEC 60335-2-17)		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
22.108	Detachable cover of adequate size (IEC 60335-2-17)		N/A
22.109	Control units prevented from dangerous penetration of objects on floor or table (IEC 60335-2-17)		P
	Distance at least 6mm.....: (IEC 60335-2-17)		N/A
22.110	Do not possible the replacement of thermal and fuse link (IEC 60335-2-17)		P
22.111	Duvet have to adequate thermal proprieties: temperature rise exceed 40K (IEC 60335-2-17)		N/A
22.112	Manual operated switch: (IEC 60335-2-17)		P
	No continuously rotation in the same direction (IEC 60335-2-17)		P
	Switches actuated by contact or proximity of a finger, with little or no movement of the contact surface: at least two manual operations to switch on the heating element but only one operation to switch it off (IEC 60335-2-17)		P
	Off position marked at both end (IEC 60335-2-17)		N/A
	On position indicated with lamp (IEC 60335-2-17)		P
22.113	Void (IEC 60335-2-17)		N/A
22.114	Wraps and pads intended to be used in close contact with the human body in order to provide heat to create moisture for cosmetic purposes, moisture-proof appliances or flexible part in Class III construction (IEC 60335-2-17)		N/A
22.115	Void (IEC 60335-2-17)		N/A
22.116	Blankets having a detachable cord for the connection of the flexible part washable (IEC 60335-2-17)		N/A
23	INTERNAL WIRING		—
23.1	Wireways smooth and free from sharp edges		P
	Wires protected against contact with burrs, cooling fins etc.		P
	Wire holes in metal well-rounded or provided with bushings		N/A
	Wiring effectively prevented from coming into contact with moving parts		P
23.2	Beads etc. on live wires cannot change their position, and are not resting on sharp edges	No beads	N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	Beads inside flexible metal conduits contained within an insulating sleeve		N/A
23.3	Electrical connections and internal conductors movable relatively to each other not exposed to undue stress		P
	Flexible metallic tubes not causing damage to insulation of conductors	No flexible metallic tubes	N/A
	Open-coil springs not used	Not used	P
	Adequate insulating lining provided inside a coiled spring, the turns of which touch one another		N/A
	No damage after 10 000 flexings for conductors flexed during normal use, or		N/A
	100 flexings for conductors flexed during user maintenance		N/A
	Electric strength test of 16.3, 1000 V between live parts and accessible metal parts		N/A
	Not more than 10% of the strands of any conductor broken, and		N/A
	not more than 30% for wiring supplying circuits that consume no more than 15W		N/A
23.4	Bare internal wiring sufficiently rigid and fixed	No bare internal wiring	N/A
23.5	The insulation of internal wiring subjected to the supply mains voltage withstanding the electrical stress likely to occur in normal use		P
	Basic insulation electrically equivalent to the basic insulation of cords complying with IEC 60227 or IEC 60245, or		N/A
	no breakdown when a voltage of 2000 V is applied for 15 min between the conductor and metal foil wrapped around the insulation	No break down	P
23.6	Sleeving used as supplementary insulation on internal wiring retained in position by clamping at both ends, or		N/A
	be such that it can only be removed by breaking or cutting		N/A
23.7	The colour combination green/yellow only used for earthing conductors		N/A
23.8	Aluminium wires not used for internal wiring		N/A
23.9	Stranded conductors not consolidated by soldering where they are subjected to contact pressure, unless		P

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	the contact pressure is provided by spring terminals		N/A
23.10	The insulation and sheath of internal wiring, incorporated in external hoses for the connection of an appliance to the water mains, at least equivalent to that of light polyvinyl chloride sheathed flexible cord (60227 IEC 52)		N/A
24	COMPONENTS		—
24.1	Components comply with safety requirements in relevant IEC standards		P
	List of components :	(see appended table)	P
	If components have not been tested and found to comply with relevant IEC standard for the number of cycles specified, they are tested in accordance with 24.1.1 to 24.1.9		P
	For components mentioned in 24.1.1 to 24.1.9 no additional tests specified in the relevant component standard are necessary other than those specified in 24.1.1 to 24.1.9		P
	Components not tested and found to comply with relevant IEC standard and components not marked or not used in accordance with its marking, tested under the conditions occurring in the appliance		P
	Lampholders and starterholders that have not being tested and found to comply with the relevant IEC standard, tested as a part of the appliance and additionally according to the gauging and interchangeability requirements of the relevant IEC standard		N/A
	No additional tests specified for nationally standardized plugs such as those detailed in IEC/TR 60083 or connectors complying with the standard sheets of IEC 60320-1 and IEC 60309		P
24.1.1	Capacitors likely to be permanently subjected to the supply voltage and used for radio interference suppression or for voltage dividing, complying with IEC 60384-14		P
	If the capacitors have to be tested, they are tested according to Annex F		N/A
24.1.2	Safety isolating transformers complying with IEC 61558-2-6		N/A
	If they have to be tested, they are tested according to Annex G		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
24.1.3	Switches complying with IEC 61058-1, the number of cycles of operation being at least 10 000		N/A
	If they have to be tested, they are tested according to Annex H		N/A
	Switches are tested for 6 000 cycles of operation (IEC 60335-2-17)		N/A
	If the switch operates a relay or contactor, the complete switching system is subjected to the test		N/A
	If the switch only operates a motor starting relay complying with IEC 60730-2-10 with the number of cycles of a least 10 000 as specified, the complete switching system need not be tested		N/A
24.1.4	Automatic controls complying with IEC 60730-1 with the relevant part 2. The number of cycles of operation being at least:		—
	- thermostats: (IEC 60335-2-17) 100 000	Used approval components	N/A
	- temperature limiters: 1 000		N/A
	- self-resetting thermal cut-outs: 10 000 (IEC 60335-2-17)		N/A
	- voltage maintained non-self-resetting thermal cut-outs: 1 000		N/A
	- other non-self-resetting thermal cut-outs: 30		N/A
	- timers: 3 000		N/A
	- energy regulators: 10 000		N/A
	The number of cycles for controls operating during clause 11 need not be declared, if the appliance meets the requirements of this standard when they are short-circuited		N/A
	Thermal motor protectors are tested in combination with their motor under the conditions specified in Annex D		N/A
	For water valves containing live parts and that are incorporated in external hoses for connection of an appliance to the water mains, the degree of protection declared for subclause 6.5.2 of IEC 60730-2-8 is IPX7		N/A
24.1.5	Appliance couplers complying with IEC 60320-1	No appliance couplers	N/A
	However, for appliances classified higher than IPX0, the appliance couplers complying with IEC 60320-2-3		N/A
	Interconnection couplers complying with IEC 60320-2-2		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	Appliance couplers used for supplying the flexible part complying with the requirements of IEC 60320-1 as far as they reasonably apply (IEC 60335-2-17)		N/A
24.1.6	Small lamp holders similar to E10 lampholders complying with IEC 60238, the requirements for E10 lampholders being applicable	No lamp holders	N/A
24.1.7	For remote operation of the appliance via a telecommunication network, the relevant standard for the telecommunication interface circuitry in the appliance is IEC 62151	No remote controller	N/A
24.1.8	The relevant standard for thermal links is IEC 60691		P
	Thermal links not complying with IEC 60691 are considered to be an intentionally weak part for the purposes of Clause 19		N/A
24.1.9	Contactors and relays, other than motor starting relays, tested as part of the appliance	No such components	N/A
	They are also tested in accordance with Clause 17 of IEC 60730-1, the number of cycles of operations in 24.1.4 selected according to the contactor or relay function in the appliance..... :		N/A
24.2	Appliances not fitted with:		—
	- switches or automatic controls in flexible cords		P
	- devices causing the protective device in the fixed wiring to operate in the event of a fault in the appliance		P
	- thermal cut-outs that can be reset by soldering, unless		N/A
	the solder has a melting point of at least 230 °C		N/A
	Appliances provided with switch and control unit in flexible cord (IEC 60335-2-17)		N/A
24.3	Switches intended for all-pole disconnection of stationary appliances are directly connected to the supply terminals and have a contact separation in all poles, providing full disconnection under overvoltage category III conditions		N/A
24.4	Plugs and socket-outlets for extra-low voltage circuits and heating elements, not interchangeable with plugs and socket-outlets listed in IEC/TR 60083 or IEC 60906-1 or with connectors and appliance inlets complying with the standard sheets of IEC 60320-1		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
24.5	Capacitors in auxiliary windings of motors marked with their rated voltage and capacitance, and used accordingly	No motor capacitor	N/A
	Voltage across capacitors in series with a motor winding does not exceed 1,1 times rated voltage, when the appliance is supplied at 1,1 times rated voltage under minimum load		N/A
24.6	Working voltage of motors connected to the supply mains and having basic insulation that is inadequate for the rated voltage of the appliance, not exceeding 42 V		N/A
	In addition, the motors comply with the requirements of Annex I		N/A
24.7	Detachable hose-sets for connection of appliances to the water mains comply with IEC 61770	No connected to water mains	N/A
	They are supplied with the appliance		N/A
	Appliances intended to be permanently connected to the water mains not connected by a detachable hose-set		N/A
24.8	Motor running capacitors in appliances for which 30.2.3 is applicable and that are permanently connected in series with a motor winding, not causing a hazard in event of a failure		N/A
	One or more of the following conditions are to be met:		—
	- the capacitors are of class P2 according to IEC 60252-1		N/A
	- the capacitors are housed within a metallic or ceramic enclosure		N/A
	- the distance of separation of the outer surface to adjacent non-metallic parts exceeds 50 mm		N/A
	- adjacent non-metallic parts within 50 mm withstand the needle-flame test of Annex E		N/A
	- adjacent non-metallic parts within 50 mm classified as at least V-1 according to IEC 60695-11-10		N/A
25	SUPPLY CONNECTION AND EXTERNAL FLEXIBLE CORDS		—
25.1	Appliance not intended for permanent connection to fixed wiring, means for connection to the supply:		—
	- supply cord fitted with a plug,	Supply cord with plug is provided	P

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	- an appliance inlet having at least the same degree of protection against moisture as required for the appliance, or		N/A
	- pins for insertion into socket-outlets		N/A
25.2	Appliance not provided with more than one means of connection to the supply mains		N/A
	Stationary appliance for multiple supply may be provided with more than one means of connection, provided electric strength test of 1250 V for 1 min between each means of connection causes no breakdown		N/A
	Blanket for double bed provided with two means of connection (IEC 60335-2-17)	No multiple supply	N/A
25.3	Appliance intended to be permanently connected to fixed wiring provided with one of the following means for connection to the supply mains:		—
	- a set of terminals allowing the connection of a flexible cord	No fixed wiring	N/A
	- a fitted supply cord		N/A
	- a set of supply leads accommodated in a suitable compartment		N/A
	- a set of terminals for the connection of cables of fixed wiring, cross-sectional areas specified in 26.6, and the appliance allows the connection of the supply conductors after the appliance has been fixed to its support		N/A
	- a set of terminals and cable entries, conduit entries, knock-outs or glands, allowing connection of appropriate types of cable or conduit, and the appliance allows the connection of the supply conductors after the appliance has been fixed to its support		N/A
	For a fixed appliance constructed so that parts can be removed to facilitate easy installation, this requirement is met if it is possible to connect the fixed wiring without difficulty after a part of the appliance has been fixed to its support		N/A
25.4	Cable and conduit entries, rated current of appliance not exceeding 16 A, dimension according to table 10 (mm)..... :		N/A
	Introduction of conduit or cable does not reduce clearances or creepage distances below values specified in clause 29		N/A
25.5	Method for assembling the supply cord to the appliance:		—

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	- type X attachment		N/A
	- type Y attachment	Supply cord provided	P
	- type Z attachment, if allowed in relevant part 2 (IEC 60335-2-17)		N/A
	Type X attachment, other than those with a specially prepared cord, not used for flat twin tinsel cords		N/A
	For multi-phase appliances supplied with a supply cord and that are intended to be permanently connected to fixed wiring, the supply cord is assembled to the appliance by type Y attachment		N/A
	Non detachable flexible cords connected to the flexible part only by type Y attachment or type Z attachment (IEC 60335-2-17)	Type Y attachment	P
25.6	Plugs fitted with only one flexible cord		P
25.7	Supply cords, other than for class III appliances, being one of the following types:		—
	- rubber sheathed (at least 60245 IEC 53)		N/A
	- polychloroprene sheathed (at least 60245 IEC 57)		N/A
	- cross-linked polyvinyl chloride sheathed (at least 60245 IEC 88)		N/A
	- polyvinyl chloride sheathed. Not used if they are likely to touch metal parts having a temperature rise exceeding 75 K during the test of clause 11		—
	<ul style="list-style-type: none"> light polyvinyl chloride sheathed cord (60227 IEC 52), for appliances not exceeding 3 kg 	VCTFK	P
	<ul style="list-style-type: none"> ordinary polyvinyl chloride sheathed cord (60227 IEC 53), for other appliances 		N/A
	Light polyvinyl chloride sheathed cords may be used, irrespective of the mass of the appliance (IEC 60335-2-17)		N/A
	- heat resistant polyvinyl chloride sheathed. Not used for type X attachment other than specially prepared cords		—
	<ul style="list-style-type: none"> heat-resistant light polyvinyl chloride sheathed cord (60227 IEC 56), for appliances not exceeding 3 kg 		N/A
	<ul style="list-style-type: none"> heat-resistant polyvinyl chloride sheathed cord (60227 IEC 57), for other appliances 		N/A
	Supply cords for class III appliances adequately insulated		N/A
	Test with 500 V for 2 min for supply cords of class III appliances that contain live parts		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
25.8	Nominal cross-sectional area of supply cords not less than table 11; rated current (A); cross-sectional area (mm ²)	5A, 0.75 mm ²	P
	Cords having a nominal cross-sectional area of 0,5mm ² may be used, irrespective of their length (IEC 60335-2-17)		N/A
25.9	Supply cords not in contact with sharp points or edges		P
25.10	Supply cord of class I appliances have a green/yellow core for earthing	Class II appliance	N/A
25.11	Conductors of supply cords not consolidated by soldering where they are subject to contact pressure, unless		P
	the contact pressure is provided by spring terminals		N/A
25.12	Insulation of the supply cord not damaged when moulding the cord to part of the enclosure	Not moulded	N/A
25.13	Inlet openings so constructed as to prevent damage to the supply cord		N/A
	If the enclosure at the inlet opening is not of insulating material, a non-detachable lining or bushing complying with 29.3 for supplementary insulation provided		N/A
	If unsheathed supply cord, a similar additional bushing or lining is required, unless the appliance is		N/A
	class 0, or		N/A
	a class III appliance not containing live parts		N/A
25.14	Supply cords moved while in operation adequately protected against excessive flexing		N/A
	Flexing test, as described:		—
	- applied force (N)..... :		N/A
	- number of flexings : : :		N/A
	The test does not result in:		—
	- short-circuit between the conductors, such that the current exceeds a value of twice the rated current		N/A
	- breakage of more than 10% of the strands of any conductor		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	- separation of the conductor from its terminal		N/A
	- loosening of any cord guard		N/A
	- damage to the cord or the cord guard		N/A
	- broken strands piercing the insulation and becoming accessible		N/A
	Test applicable to appliances fitted with a non-detachable flexible cord (IEC 60335-2-17)		N/A
	Test applicable to switches and controls fitted in the flexible cord (IEC 60335-2-17)		N/A
25.15	For appliances with supply cord and appliances to be permanently connected to fixed wiring by a flexible cord, conductors of the supply cord relieved from strain, twisting and abrasion by use of cord anchorage		P
	The cord cannot be pushed into the appliance to such an extent that the cord or internal parts of the appliance can be damaged		P
	Pull and torque test of supply cord, values shown in table 12: mass (kg); pull (N); torque (not on automatic cord reel) (Nm)..... :		P
	Pull force of 100 N for cord connected to flexible part (IEC 60335-2-17)	3.2 kg, 100 N	P
	Pull force of 100 N and torque of 0,1 Nm for cord connected to switch and control unit (IEC 60335-2-17)	0.5 kg, 100 N, 0.1 Nm	P
	Cord not damaged and max. 2 mm displacement of the cord	Flexible part: 0.2 mm Controller: 0.2 mm	P
25.16	Cord anchorages for type X attachments constructed and located so that:		—
	- replacement of the cord is easily possible		N/A
	- it is clear how the relief from strain and the prevention of twisting are obtained		N/A
	- they are suitable for different types of supply cord		N/A
	- cord cannot touch the clamping screws of cord anchorage if these screws are accessible, unless		N/A
	they are separated from accessible metal parts by supplementary insulation		N/A
	- the cord is not clamped by a metal screw which bears directly on the cord		N/A
	- at least one part of the cord anchorage securely fixed to the appliance, unless		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	it is part of a specially prepared cord		N/A
	- screws which have to be operated when replacing the cord do not fix any other component, unless		N/A
	the appliance becomes inoperative or incomplete or the parts cannot be removed without a tool		N/A
	- if labyrinths can be bypassed the test of 25.15 is nevertheless withstood		N/A
	- for class 0, 0I and I appliances they are of insulating material or are provided with an insulating lining, unless		N/A
	failure of the insulation of the cord does not make accessible metal parts live		N/A
	- for class II appliances they are of insulating material, or		N/A
	if of metal, they are insulated from accessible metal parts by supplementary insulation		N/A
	After the test of 25.15, under the conditions specified, the conductors have not moved by more than 1 mm in the terminals		N/A
25.17	Adequate cord anchorages for type Y and Z attachment, test with the cord supplied with the appliance		P
25.18	Cord anchorages only accessible with the aid of a tool, or		P
	Constructed so that the cord can only be fitted with the aid of a tool		N/A
25.19	Type X attachment, glands not used as cord anchorage in portable appliances		N/A
	Tying the cord into a knot or tying the cord with string not used		N/A
25.20	The insulated conductors of the supply cord for type Y and Z attachment additionally insulated from accessible metal parts		N/A
25.21	Space for supply cord for type X attachment or for connection of fixed wiring constructed:		—
	- to permit checking of conductors with respect to correct positioning and connection before fitting any cover		N/A
	- so there is no risk of damage to the conductors or their insulation when fitting the cover		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	- for portable appliances, so that the uninsulated end of a conductor, if it becomes free from the terminal, prevented from contact with accessible metal parts		N/A
	2 N test to the conductor for portable appliances; no contact with accessible metal parts		N/A
25.22	Appliance inlets:		—
	- live parts not accessible during insertion or removal	No appliance inlets	N/A
	Requirement not applicable to appliance inlets complying with IEC 60320-1		N/A
	- connector can be inserted without difficulty		N/A
	- the appliance is not supported by the connector		N/A
	- not for cold conditions if temp. rise of external metal parts exceeds 75 K during clause 11, unless		N/A
	the supply cord is unlikely to touch such metal parts		N/A
25.23	Interconnection cords comply with the requirements for the supply cord, except that:	No appliance inlets	N/A
	- the cross-sectional area of the conductors is determined on the basis of the maximum current during clause 11		N/A
	- the thickness of the insulation may be reduced		N/A
	If necessary, electric strength test of 16.3		N/A
	For blankets and mattresses, interconnection cord without sheathed (IEC 60335-2-17)		N/A
	For more than two conductor, current density not exceed 12 A/mm ² and the sum of the cross sectional area 1 mm ² (IEC 60335-2-17)		N/A
	Electrical and mechanical proprieties equal to IEC 60227 (IEC 60335-2-17)		N/A
25.24	Interconnection cords not detachable without the aid of a tool if compliance with this standard is impaired when they are disconnected		N/A
25.25	Dimensions of pins that are inserted into socket-outlets compatible with the dimensions of the relevant socket-outlet.		N/A
	Dimensions of pins and engagement face in accordance with the dimensions of the relevant plug in IEC/TR 60083		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
25.101	Length of cord of washable appliances fitted with a non-detachable flexible cord at least 0,4 m (IEC 60335-2-17)	No washable appliance	N/A
26	TERMINALS FOR EXTERNAL CONDUCTORS		—
26.1	Appliances provided with terminals or equally effective devices for connection of external conductors		P
	Terminals only accessible after removal of a non-detachable cover, except		P
	for class III appliances that do not contain live parts		N/A
	Earthing terminals may be accessible if a tool is required to make the connections and means are provided to clamp the wire independently from its connection		N/A
26.2	Appliances with type X attachment and appliances for the connection of cables to fixed wiring provided with terminals in which connections are made by means of screws, nuts or similar devices, unless	Type Y attachment	N/A
	the connections are soldered		N/A
	Screws and nuts not used to fix any other component, except		N/A
	internal conductors, if so arranged that they are unlikely to be displaced when fitting the supply conductors		N/A
	If soldered connections used, the conductor so positioned or fixed that reliance is not placed on soldering alone, unless		N/A
	barriers provided so that neither clearances nor creepage distances between live parts and other metal parts reduced below the values for supplementary insulation if the conductor becomes free at the soldered joint		N/A
26.3	Terminals for type X attachment and for connection of cables of fixed wiring so constructed that the conductor is clamped between metal surfaces with sufficient contact pressure but without damaging the conductor		N/A
	Terminals fixed so that when the clamping means is tightened or loosened:		—
	- the terminal does not become loose		N/A
	- internal wiring is not subjected to stress		N/A
	- neither clearances nor creepage distances are reduced below the values in clause 29		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	Compliance checked by inspection and by the test of subclause 9.6 of IEC 60999-1, the torque applied being equal to two-thirds of the torque specified (Nm) :		N/A
	No deep or sharp indentations of the conductors		N/A
26.4	Terminals for type X attachment, except those having a specially prepared cord and those for the connection of cables of fixed wiring, no special preparation of conductors such as by soldering, use of cable lugs, eyelets or similar, and		N/A
	so constructed or placed that conductors prevented from slipping out when clamping screws or nuts are tightened		N/A
26.5	Terminals for type X attachment so located or shielded that if a wire of a stranded conductor escapes, no risk of accidental connection to other parts that result in a hazard		N/A
	Stranded conductor test, 8 mm insulation removed		N/A
	No contact between live parts and accessible metal parts and,		N/A
	for class II constructions, between live parts and metal parts separated from accessible metal parts by supplementary insulation only		N/A
26.6	Terminals for type X attachment and for connection of cables of fixed wiring suitable for connection of conductors with cross-sectional area according to table 13; rated current (A); nominal cross-sectional area (mm ²)..... :		N/A
	If a specially prepared cord is used, terminals need only be suitable for that cord		N/A
26.7	Terminals for type X attachment, except in class III appliances not containing live parts, accessible after removal of a cover or part of the enclosure		N/A
26.8	Terminals for the connection of fixed wiring, including the earthing terminal, located close to each other		P
26.9	Terminals of the pillar type constructed and located as specified	No pillar type	N/A
26.10	Terminals with screw clamping and screwless terminals not used for flat twin tinsel cords, unless		N/A
	conductors ends fitted with means suitable for screw terminals		N/A
	Pull test of 5 N to the connection		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
26.11	For type Y and Z attachment, soldered, welded, crimped or similar connections may be used		P
	For Class II appliances, the conductor so positioned or fixed that reliance is not placed on soldering, welding or crimping alone		N/A
	If soldering, welding or crimping alone used, barriers provided so that clearances and creepage distances between live parts and other metal parts are not reduced below the values for supplementary insulation if the conductor becomes free		N/A
27	PROVISION FOR EARTHING		—
27.1	Accessible metal parts of Class 0I and I appliances permanently and reliably connected to an earthing terminal or earthing contact of the appliance inlet		N/A
	Earthing terminals and earthing contacts not connected to the neutral terminal		N/A
	Class 0, II and III appliances have no provision for earthing	Class II appliance	P
	Safety extra-low voltage circuits not earthed, unless		N/A
	protective extra-low voltage circuits		N/A
27.2	Clamping means of earthing terminals adequately secured against accidental loosening		N/A
	Terminals for the connection of external equipotential bonding conductors allow connection of conductors of 2.5 to 6 mm ² , and		N/A
	do not provide earthing continuity between different parts of the appliance, and		N/A
	conductors cannot be loosened without the aid of a tool		N/A
27.3	For a detachable part having an earth connection and being plugged into another part of the appliance, the earth connection is made before and separated after current-carrying connections when removing the part		N/A
	For appliances with supply cords, current-carrying conductors become taut before earthing conductor, if the cord slips out of the cord anchorage		N/A
27.4	No risk of corrosion resulting from contact between parts of the earthing terminal and the copper of the earthing conductor or other metal		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	Parts providing earthing continuity, other than parts of a metal frame or enclosure, have adequate resistance to corrosion		N/A
	If of steel, these parts provided with an electroplated coating with a thickness at least 5 µm		N/A
	Adequate protection against rusting of parts of coated or uncoated steel, only intended to provide or transmit contact pressure		N/A
	In the body of the earthing terminal is a part of a frame or enclosure of aluminium or aluminium alloys, precautions taken to avoid risk of corrosion		N/A
27.5	Low resistance of connection between earthing terminal and earthed metal parts		N/A
	This requirement does not apply to connections providing earthing continuity in the protective extra-low voltage circuit, provided the clearances of basic insulation are based on the rated voltage of the appliance		N/A
	Resistance not exceeding 0,1 Ω at the specified low-resistance test (Ω)..... :		N/A
27.6	The printed conductors of printed circuit boards not used to provide earthing continuity in hand-held appliances.		N/A
	They may be used to provide earthing continuity in other appliances if at least two tracks are used with independent soldering points and the appliance complies with 27.5 for each circuit		N/A
28	SCREWS AND CONNECTIONS		—
28.1	Fixings, electrical connections and connections providing earthing continuity withstand mechanical stresses		P
	Screws not of soft metal liable to creep, such as zinc or aluminium		P
	Diameter of screws of insulating material min. 3 mm	No insulation material	N/A
	Screws of insulating material not used for any electrical connections or connections providing earthing continuity		N/A
	Screws used for electrical connections or connections providing earthing continuity screwed into metal		P

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	Screws not of insulating material if their replacement by a metal screw can impair supplementary or reinforced insulation		P
	For type X attachment, screws to be removed for replacement of supply cord or for user maintenance, not of insulating material if their replacement by a metal screw impairs basic insulation		N/A
	For screws and nuts; torque-test as specified in table 14..... :	(see appended table)	P
28.2	Electrical connections and connections providing earthing continuity constructed so that contact pressure is not transmitted through non-ceramic insulating material liable to shrink or distort, unless		N/A
	there is resiliency in the metallic parts to compensate for shrinkage or distortion of the insulating material		N/A
	This requirement does not apply to electrical connections in circuits of appliances for which:		—
	<ul style="list-style-type: none"> 30.2.2 is applicable and that carry a current not exceeding 0,5 A 		N/A
	<ul style="list-style-type: none"> 30.2.3 is applicable and that carry a current not exceeding 0,2 A 		N/A
	The requirement does not apply to the connections to heating element and electro-conductive textiles (IEC 60335-2-17)		N/A
28.3	Space-threaded (sheet metal) screws only used for electrical connections if they clamp the parts together		N/A
	Thread-cutting (self-tapping) screws and thread rolling screws only used for electrical connections if they generate a full form standard machine screw thread		N/A
	Thread-cutting (self-tapping) screws not used if they are likely to be operated by the user or installer		N/A
	Thread-cutting, thread rolling and space threaded screws may be used in connections providing earthing continuity provided it is not necessary to disturb the connection:		—
	- in normal use,		N/A
	- during user maintenance,		N/A
	- when replacing a supply cord having a type X attachment, or		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	- during installation		N/A
	At least two screws being used for each connection providing earthing continuity, unless		N/A
	the screw forms a thread having a length of at least half the diameter of the screw		N/A
28.4	Screws and nuts that make mechanical connection secured against loosening if they also make electrical connections or connections providing earthing continuity		P
	This requirement does not apply to screws in the earthing circuit if at least two screws are used, or		N/A
	if an alternative earthing circuit is provided		N/A
	Rivets for electrical connections or connections providing earthing continuity secured against loosening if the connections are subjected to torsion		N/A
29	CLEARANCES, CREEPAGE DISTANCES AND SOLID INSULATION		—
	Clearances, creepage distances and solid insulation withstand electrical stress		P
	For coatings used on printed circuits boards to protect the microenvironment (Type 1) or to provide basic insulation (Type 2), Annex J applies..... :		N/A
	The microenvironment is pollution degree 1 under type 1 protection		N/A
	For type 2 protection, the spacing between the conductors before the protection is applied is not less than the values specified in Table 1 of IEC 60664-3		N/A
	These values apply to functional, basic, supplementary and reinforced insulation :		N/A
29.1	Clearances not less than the values specified in table 16, taking into account the rated impulse voltage for the overvoltage categories of table 15, unless :	(see appended table)	P
	for basic insulation and functional insulation they comply with the impulse voltage test of clause 14		N/A
	However, if the distances are affected by wear, distortion, movement of the parts or during assembly, the clearances for rated impulse voltages of 1500V and above are increased by 0,5 mm and the impulse voltage test is not applicable		N/A
	Impulse voltage test is not applicable:		—

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	- when the microenvironment is pollution degree 3, or		N/A
	- for basic insulation of class 0 and class 01 appliances		N/A
	Appliances are in overvoltage category II		N/A
	A force of 2 N is applied to bare conductors, other than heating elements		N/A
	A force of 30 N is applied to accessible surfaces		N/A
29.1.1	Clearances of basic insulation withstand the overvoltages, taking into account the rated impulse voltage		P
	The values of table 16 or the impulse voltage test of clause 14 are applicable..... :	(see appended table)	P
	Clearance at the terminals of tubular sheathed heating elements may be reduced to 1,0 mm if the microenvironment is pollution degree 1		N/A
	Lacquered conductors of windings considered to be bare conductors		P
29.1.2	Clearances of supplementary insulation not less than those specified for basic insulation in table 16		N/A
29.1.3	Clearances of reinforced insulation not less than those specified for basic insulation in table 16, using the next higher step for rated impulse voltage		P
	For double insulation, with no intermediate conductive part between basic and supplementary insulation, clearances are measured between live parts and the accessible surface, and the insulation system is treated as reinforced insulation		N/A
	Clearance between the engagement face and contact tubes of appliance couplers at least 3,5 mm (IEC 60335-2-17)		N/A
29.1.4	Clearances for functional insulation are the largest values determined from:		—
	- table 16 based on the rated impulse voltage :		N/A
	- table F.7a in IEC 60664-1, frequency not exceeding 30 kHz		N/A
	- clause 4 of IEC 60664-4, frequency exceeding 30 kHz		N/A
	If values of table 16 are largest, the impulse voltage test of clause 14 may be applied instead, unless		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	the microenvironment is pollution degree 3, or		N/A
	the distances can be affected by wear, distortion, movement of the parts or during assembly		N/A
	However, clearances are not specified if the appliance complies with clause 19 with the functional insulation short-circuited		P
	Lacquered conductors of windings considered to be bare conductors		N/A
	However, clearances at crossover points are not measured		N/A
	Clearance between surfaces of PTC heating elements may be reduced to 1mm	No PTC heating elements	N/A
29.1.5	Appliances having higher working voltages than rated voltage, clearances for basic insulation are the largest values determined from:		—
	- table 16 based on the rated impulse voltage :		N/A
	- table F.7a in IEC 60664-1, frequency not exceeding 30 kHz		N/A
	- clause 4 of IEC 60664-4, frequency exceeding 30 kHz		N/A
	If clearances for basic insulation are selected from Table F.7a of IEC 60664-1 or Clause 4 of IEC 60664-4, the clearances of supplementary insulation are not less than those specified for basic insulation		N/A
	If clearances for basic insulation are selected from Table F.7a of IEC 60664-1, the clearances of reinforced insulation dimensioned as specified in Table F.7a are to withstand 160% of the withstand voltage required for basic insulation		N/A
	If clearances for basic insulation are selected from Clause 4 of IEC 60664-4, the clearances of reinforced insulation are twice the value required for basic insulation		N/A
	If the secondary winding of a step-down transformer is earthed, or if there is an earthed screen between the primary and secondary windings, clearances of basic insulation on the secondary side not less than those specified in table 16, but using the next lower step for rated impulse voltage		N/A
	Circuits supplied with a voltage lower than rated voltage, clearances of functional insulation are based on the working voltage used as the rated voltage in table 15		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
29.2	Creepage distances not less than those appropriate for the working voltage, taking into account the material group and the pollution degree	(see appended table)	P
	Pollution degree 2 applies, unless	Controller part	P
	- precautions taken to protect the insulation; pollution degree 1		N/A
	- insulation subjected to conductive pollution; pollution degree 3		N/A
	Microenvironment of the flexible part: pollution degree 3 applies, unless (IEC 60335-2-17)	Flexible part	P
	enclose or located so that it is unlikely to be exposed to pollution during normal use (IEC 60335-2-17)		N/A
	A force of 2 N is applied to bare conductors, other than heating elements		P
	A force of 30 N is applied to accessible surfaces		P
	In a double insulation system, the working voltage for both the basic and supplementary insulation is taken as the working voltage across the complete double insulation system		N/A
29.2.1	Creepage distances of basic insulation not less than specified in table 17	(see appended table)	P
	However, if the working voltage is periodic and has a frequency exceeding 30 kHz, the creepage distances are also determined from table 2 of IEC 60664-4, these values being used if exceeding the values in table 17		N/A
	Except for pollution degree 1, corresponding creepage distance not less than the minimum specified for the clearance in table 16, if the clearance has been checked according to the test of clause 14		P
29.2.2	Creepage distances of supplementary insulation at least those specified for basic insulation in table 17, or		N/A
	Table 2 of IEC 60664-4, as applicable		N/A
29.2.3	Creepage distances of reinforced insulation at least double those specified for basic insulation in table 17, or	(see appended table)	P
	Table 2 of IEC 60664-4, as applicable		N/A
29.2.4	Creepage distances of functional insulation not less than specified in table 18.....		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	However, if the working voltage is periodic and has a frequency exceeding 30 kHz, the creepage distances are also determined from table 2 of IEC 60664-4, these values being used if exceeding the values in table 18		N/A
	Creepage distances may be reduced if the appliance complies with clause 19 with the functional insulation short-circuited		P
29.3	Supplementary and reinforced insulation have adequate thickness, or a sufficient number of layers, to withstand the electrical stresses		P
	Compliance checked:		—
	- by measurement, in accordance with 29.3.1, or		P
	- by an electric strength test in accordance with 29.3.2, or		P
	- by an assessment of the thermal quality of the material combined with an electric strength test, in accordance with 29.3.3, and		N/A
	for accessible parts of reinforced insulation consisting of a single layer, by measurement in accordance with 29.3.4, or		N/A
	- as specified in subclause 6.3 of IEC 60664-4 for insulation that is subjected to any periodic voltage having a frequency exceeding 30 kHz		N/A
	The requirement does not apply to the flexible part (IEC 60335-2-17)		P
29.3.1	Supplementary insulation have a thickness of at least 1 mm		N/A
	Reinforced insulation have a thickness of at least 2 mm		P
29.3.2	Each layer of material withstand the electric strength test of 16.3 for supplementary insulation		P
	Supplementary insulation consist of at least 2 layers		N/A
	Reinforced insulation consist of at least 3 layers		P
29.3.3	The insulation is subjected to the dry heat test Bb of IEC 60068-2-2, followed by		N/A
	the electric strength test of 16.3		N/A
	If the temperature rise during the tests of clause 19 does not exceed the value specified in table 3, the test of IEC 60068-2-2 is not carried out		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
29.3.4	Thickness of accessible parts of reinforced insulation consisting of a single layer not less than specified in table 19..... :		N/A
30	RESISTANCE TO HEAT AND FIRE		—
30.1	External parts of non-metallic material,		P
	parts supporting live parts, and		P
	parts of thermoplastic material providing supplementary or reinforced insulation		N/A
	sufficiently resistant to heat		P
	Ball-pressure test according to IEC 60695-10-2		P
	External parts tested at 40 °C plus the maximum temperature rise determined during the test of clause 11, or at 75 °C, whichever is the higher; temperature (°C)..... :	(see appended table)	P
	Parts supporting live parts tested at 40°C plus the maximum temperature rise determined during the test of clause 11, or at 125 °C, whichever is the higher; temperature (°C)..... :	(see appended table)	P
	Parts of thermoplastic material providing supplementary or reinforced insulation tested at 25 °C plus the maximum temperature rise determined during clause 19, if higher; temperature (°C) :		N/A
	The enclosure of the flexible part is not tested (IEC 60335-2-17)		P
	Parts of resilient plastic material fitted to the flexible part, pressure test according to sub-clause 24.1.3 of IEC 60320-1 (IEC 60335-2-17)		N/A
30.2	Parts of non-metallic material resistant to ignition and spread of fire		P
	This requirement does not apply to:		
	parts having a mass not exceeding 0,5 g, provided the cumulative effect is unlikely to propagate flames that originate inside the appliance by propagating flames from one part to another, or		P
	decorative trims, knobs and other parts unlikely to be ignited or to propagate flames that originate inside the appliance		P
	Compliance checked by the test of 30.2.1, and in addition 30.2.3 (IEC 60335-2-17)		P
	For appliances for remote operation, 30.2.3 applies		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	For base material of printed circuit boards, 30.2.4 applies		N/A
	The enclosure of the flexible part is not tested (IEC 60335-2-17)		P
30.2.1	Parts of non-metallic material subjected to the glow-wire test of IEC 60695-2-11 at 550 °C		P
	However, test not carried out if the material is classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least 550 °C, or		N/A
	the material is classified at least HB40 according to IEC 60695-11-10		N/A
	Parts for which the glow-wire test cannot be carried out need to meet the requirements in ISO 9772 for material classified HBF		N/A
30.2.2	Appliances operated while attended, parts of non-metallic material supporting current-carrying connections, and	Unattended appliances	N/A
	parts of non-metallic material within a distance of 3mm of such connections,		N/A
	subjected to the glow-wire test of IEC 60695-2-11		N/A
	The test severity is:		—
	- 750 °C, for connections carrying a current exceeding 0,5 A during normal operation		N/A
	- 650 °C, for other connections		N/A
	Glow-wire applied to an interposed shielding material, if relevant		N/A
	The glow-wire test is not carried out on parts of material classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least:		—
	- 750 °C, for connections carrying a current exceeding 0,5 A during normal operation		N/A
	- 650 °C, for other connections		N/A
	The glow-wire test is also not carried out on small parts. These parts are to:		—
	- comprise material having a glow-wire flammability index of at least 750 °C, or 650 °C as appropriate, or		N/A
	- comply with the needle-flame test of Annex E, or		N/A
	- comprise material classified as V-0 or V-1 according to IEC 60695-11-10		N/A
	Glow-wire test not applicable to conditions as specified		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	30.2.2 Not applicable (other than clothing – see Annex CC) (IEC 60335-2-17)		N/A
30.2.3	Appliances operated while unattended, tested as specified in 30.2.3.1 and 30.2.3.2		P
	The tests are not applicable to conditions as specified :		P
30.2.3.1	Parts of non-metallic material supporting connections carrying a current exceeding 0,2 A during normal operation, and		P
	parts of non-metallic material, other than small parts, within a distance of 3 mm,		P
	subjected to the glow-wire test of IEC 60695-2-11 with a test severity of 850 °C		P
	Glow-wire applied to an interposed shielding material, if relevant		N/A
	The glow-wire test is not carried out on parts of material classified as having a glow-wire flammability index according to IEC 60695-2-12 of at least 850 °C		N/A
30.2.3.2	Parts of non-metallic material supporting connections, and		P
	parts of non-metallic material within a distance of 3mm,		P
	subjected to glow-wire test of IEC 60695-2-11		P
	The test severity is:		—
	- 750 °C, for connections carrying a current exceeding 0,2 A during normal operation		P
	- 650 °C, for other connections		N/A
	Glow-wire applied to an interposed shielding material, if relevant		N/A
	However, the glow-wire test of 750 °C or 650 °C as appropriate, is not carried out on parts of material fulfilling both or either of the following classifications:		—
	- a glow-wire ignition temperature according to IEC 60695-2-13 of at least:		N/A
	<ul style="list-style-type: none"> 775 °C, for connections carrying a current exceeding 0,2 A during normal operation 		N/A
	<ul style="list-style-type: none"> 675 °C, for other connections 		N/A
	- a glow-wire flammability index according to IEC 60695-2-12 of at least:		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	- 750 °C, for connections carrying a current exceeding 0,2 A during normal operation		N/A
	- 650 °C, for other connections		N/A
	The glow-wire test is also not carried out on small parts. These parts are to:		—
	- comprise material having a glow-wire ignition temperature of at least 775 °C or 675 °C as appropriate, or		N/A
	- comprise material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N/A
	- comply with the needle-flame test of Annex E, or		N/A
	- comprise material classified as V-0 or V-1 according to IEC 60695-11-10		N/A
	The consequential needle-flame test of Annex E applied to non-metallic parts that encroach within the vertical cylinder placed above the centre of the connection zone and on top of the non-metallic parts supporting current-carrying connections, and parts of non-metallic material within a distance of 3 mm of such connections if these parts are those:		—
	- parts that withstood the glow-wire test of IEC 60695-2-11 of 750 °C or 650 °C as appropriate, but produce a flame that persist longer than 2 s, or		N/A
	- parts that comprised material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N/A
	- small parts, that comprised material having a glow-wire flammability index of at least 750 °C or 650 °C as appropriate, or		N/A
	- small parts for which the needle-flame test of Annex E was applied, or		N/A
	- small parts for which a material classification of V-0 or V-1 was applied		N/A
	However, the consequential needle-flame test is not carried out on non-metallic parts, including small parts, within the cylinder that are:		—
	- parts having a glow-wire ignition temperature of at least 775 °C or 675 °C as appropriate, or		N/A
	- parts comprising material classified as V-0 or V-1 according to IEC 60695-11-10, or		N/A
	- parts shielded by a flame barrier that meets the needle-flame test of Annex E or that comprises material classified as V-0 or V-1 according to IEC 60695-11-10		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	Needle-flame test not carried out on the enclosure of the flexible part (IEC 60335-2-17)		N/A
30.2.4	Base material of printed circuit boards subjected to the needle-flame test of Annex E		N/A
	Test not applicable to conditions as specified :	V-0	P
30.101	The enclosure of the flexible part adequately resistant to ignition (IEC 60335-2-17)		N/A
	Unless means to prevent overheating incorporated in the appliance (IEC 60335-2-17)		N/A
30.101.1	Spark ignition test results (s) (limit not less than 80 s average) (IEC 60335-2-17)		N/A
30.101.2	Protection system operate within 30 s, the power input does not exceed 1 W (IEC 60335-2-17)		N/A
30.102	Insulation of heating elements and internal wiring in flexible part, and other insulating parts retaining live parts in position, sufficient resistance to abnormal heat and fire (IEC 60335-2-17)		N/A
	Heating element and internal wiring in flexible part, max. length (mm) damaged by fire (65 mm max.) (IEC 60335-2-17)		N/A
31	RESISTANCE TO RUSTING		—
	Relevant ferrous parts adequately protected against rusting		P
	Tests specified in part 2 when necessary		N/A
32	RADIATION, TOXICITY AND SIMILAR HAZARDS		—
	Appliance does not emit harmful radiation or present a toxic or similar hazard due to their operation in normal use		P
	Compliance is checked by the limits or tests specified in part 2, if relevant		N/A
A	ANNEX A (INFORMATIVE) ROUTINE TESTS		—
	Description of routine tests to be carried out by the manufacturer		P
B	ANNEX B (NORMATIVE) APPLIANCES POWERED BY RECHARGEABLE BATTERIES		—

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	The following modifications to this standard are applicable for appliances powered by batteries that are recharged in the appliance	No such components	N/A
	This annex does not apply to battery chargers		N/A
3.1.9	Appliance operated under the following conditions:		—
	- the appliance, supplied by its fully charged battery, operated as specified in relevant part 2		N/A
	- the battery is charged, the battery being initially discharged to such an extent that the appliance cannot operate		N/A
	-if possible, the appliance is supplied from the supply mains through its battery charger, the battery being initially discharged to such an extent that the appliance cannot operate. The appliance is operated as specified in relevant part 2		N/A
	- if the appliance incorporates inductive coupling between two parts that are detachable from each other, the appliance is supplied from the supply mains with the detachable part removed		N/A
3.6.2	Part to be removed in order to discard the battery is not considered to be detachable		N/A
5.B.101	Appliances supplied from the supply mains tested as specified for motor-operated appliances		N/A
7.1	Battery compartment for batteries intended to be replaced by the user, marked with battery voltage and polarity of the terminals		N/A
	The positive terminal indicated by symbol IEC 60417-5005 and the negative terminal by symbol IEC 60417-5006		N/A
7.6	Symbols 60417-5005 and IEC 60417-5006		N/A
7.12	The instructions give information regarding charging		N/A
	The instructions for appliances incorporating batteries intended to be replaced by the user includes required information		N/A
	Details about how to remove batteries containing materials hazardous to the environment given		N/A
7.15	Markings placed on the part of the appliance connected to the supply mains		N/A
8.2	Appliances having batteries that according to the instruction may be replaced by the user need only have basic insulation between live parts and the inner surface of the battery compartment		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	If the appliance can be operated without batteries, double or reinforced insulation required		N/A
11.7	The battery is charged for the period stated in the instructions or 24 h :		N/A
19.1	Appliances subjected to tests of 19.B.101, 19.B.102 and 19.B.103		N/A
19.10	Not applicable		N/A
19.B.101	Appliances supplied at rated voltage for 168 h, the battery being continually charged		N/A
19.B.102	For appliances having batteries that can be removed without the aid of a tool, short-circuit of the terminals of the battery, the battery being fully charged,		N/A
19.B.103	Appliances having batteries replaceable by the user supplied at rated voltage under normal operation with the battery removed or in any position allowed by the construction		N/A
21.B.101	Appliances having pins for insertion into socket-outlets have adequate mechanical strength		N/A
	Part of the appliance incorporating the pins subjected to the free fall test, procedure 2, of IEC 60068-2-31, the number of falls being:		—
	- 100, if the mass of the part does not exceed 250 g (g) :		N/A
	- 50, if the mass of the part exceeds 250 g :		N/A
	After the test, the requirements of 8.1, 15.1.1, 16.3 and clause 29 are met		N/A
22.3	Appliances having pins for insertion into socket-outlets tested as fully assembled as possible		N/A
25.13	An additional lining or bushing not required for interconnection cords in class III appliances or class III constructions operating at safety extra-low voltage not containing live parts		N/A
30.2	For parts of the appliance connected to the supply mains during the charging period, 30.2.3 applies		N/A
	For other parts, 30.2.2 applies		N/A
C	ANNEX C (NORMATIVE) AGEING TEST ON MOTORS		—
	Tests, as described, carried out when doubt with regard to the temperature classification of the insulation of a motor winding		N/A
	Test conditions as specified		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
D	ANNEX D (NORMATIVE) THERMAL MOTOR PROTECTORS		—
	Applicable to appliances having motors that incorporate thermal motor protectors necessary for compliance with the standard		N/A
	Test conditions as specified		N/A
E	ANNEX E (NORMATIVE) NEEDLE-FLAME TEST		—
	Needle-flame test carried out in accordance with IEC 60695-11-5, with the following modifications:		N/A
7	Severities		—
	The duration of application of the test flame is 30 s ± 1 s		N/A
9	Test procedure		—
9.1	The specimen so arranged that the flame can be applied to a vertical or horizontal edge as shown in the examples of Figure 1		N/A
9.2	The first paragraph does not apply		N/A
	If possible, the flame is applied at least 10 mm from a corner		N/A
9.3	The test is carried out on one specimen		N/A
	If the specimen does not withstand the test, the test may be repeated on two additional specimens, both withstanding the test		N/A
11	Evaluation of test results		—
	The duration of burning not exceeding 30 s		N/A
	However, for printed circuit boards, the duration of burning not exceeding 15 s		N/A
F	ANNEX F (NORMATIVE) CAPACITORS		—
	Capacitors likely to be permanently subjected to the supply voltage, and used for radio interference suppression or voltage dividing, comply with the following clauses of IEC 60384-14, with the following modifications:		—
1.5	Terms and definitions		—
1.5.3	Class X capacitors tested according to subclass X2		N/A
1.5.4	This subclause is applicable		N/A
1.6	Marking		—
	Items a) and b) are applicable		N/A
3.4	Approval testing		—

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
3.4.3.2	Table 3 is applicable as described		N/A
4.1	Visual examination and check of dimensions		—
	This subclause is applicable		N/A
4.2	Electrical tests		—
4.2.1	This subclause is applicable		N/A
4.2.5	This subclause is applicable		N/A
4.2.5.2	Only table 11 is applicable		N/A
	Values for test A apply		N/A
	However, for capacitors in heating appliances the values for test B or C apply		N/A
4.12	Damp heat, steady state		—
	This subclause is applicable		N/A
	Only insulation resistance and voltage proof are checked		N/A
4.13	Impulse voltage		—
	This subclause is applicable		N/A
4.14	Endurance		—
	Subclauses 4.14.1, 4.14.3, 4.14.4 and 4.14.7 are applicable		N/A
4.14.7	Only insulation resistance and voltage proof are checked		N/A
	No visible damage		N/A
4.17	Passive flammability test		—
	This subclause is applicable		N/A
4.18	Active flammability test		—
	This subclause is applicable		N/A
G	ANNEX G (NORMATIVE) SAFETY ISOLATING TRANSFORMERS		—
	The following modifications to this standard are applicable for safety isolating transformers:		—
7	Marking and instructions		—
7.1	Transformers for specific use marked with:		—
	-name, trademark or identification mark of the manufacturer or responsible vendor		N/A
	-model or type reference		N/A
17	Overload protection of transformers and associated circuits		—

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	Fail-safe transformers comply with subclause 15.5 of IEC 61558-1		N/A
22	Construction		—
	Subclauses 19.1 and 19.1.2 of IEC 61558-2-6 are applicable		P
29	Clearances, creepage distances and solid insulation		—
29.1, 29.2, 29.3	The distances specified in items 2a, 2c and 3 in table 13 of IEC 61558-1 apply		P
	For insulated winding wires complying with subclause 19.12.3 of IEC 61558-1 there are no requirements for clearances or creepage distances		P
	For windings providing reinforced insulation, the distance specified in item 2c of table 13 of IEC 61558-1 is not assessed		N/A
	For safety isolating transformers subjected to periodic voltages with a frequency exceeding 30 kHz, the clearances, creepage distances and solid insulation values specified in IEC 60664-4 are applicable, if greater than the values specified in items 2a, 2c and 3 in table 13 of IEC 61558-1		N/A
H	ANNEX H (NORMATIVE) SWITCHES		—
	Switches comply with the following clauses of IEC 61058-1, as modified below:		—
	The tests of IEC 61058-1 carried out under the conditions occurring in the appliance		N/A
	Before being tested, switches are operated 20 times without load		N/A
8	Marking and documentation		—
	Switches are not required to be marked		N/A
	However, a switch that can be tested separately from the appliance marked with the manufacturer's name or trade mark and the type reference		N/A
13	Mechanism		—
	The tests may be carried out on a separate sample		N/A
15	Insulation resistance and dielectric strength		—
15.1	Not applicable		N/A
15.2	Not applicable		N/A
15.3	Applicable for full disconnection and micro-disconnection		N/A
17	Endurance		—

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	Compliance is checked on three separate appliances or switches		N/A
	For 17.2.4.4, the number of cycles declared according to 7.1.4 is 10 000, unless		N/A
	otherwise specified in 24.1.3 of the relevant part 2 of IEC 60335..... :		N/A
	Switches for operation under no load and which can be operated only by a tool, and		N/A
	switches operated by hand that are interlocked so that they cannot be operated under load,		N/A
	are not subjected to the tests		N/A
	However, switches without this interlock are subjected to the test of 17.2.4.4 for 100 cycles of operation		N/A
	Subclauses 17.2.2 and 17.2.5.2 not applicable		N/A
	The ambient temperature during the test is that occurring in the appliance during the test of Clause 11 in IEC 60335-1		N/A
	The temperature rise of the terminals not more than 30 K above the temperature rise measured in clause 11 of IEC 60335-1 (K)..... :		N/A
20	Clearances, creepage distances, solid insulation and coatings of rigid printed board assemblies		—
	This clause is applicable to clearances and creepage distances for functional insulation, across full disconnection and micro-disconnection, as stated in table 24		N/A
I	ANNEX I (NORMATIVE) MOTORS HAVING BASIC INSULATION THAT IS INADEQUATE FOR THE RATED VOLTAGE OF THE APPLIANCE		—
	The following modifications to this standard are applicable for motors having basic insulation that is inadequate for the rated voltage of the appliance:		—
8	Protection against access to live parts		—
8.1	Metal parts of the motor are considered to be bare live parts		N/A
11	Heating		—
11.3	The temperature rise of the body of the motor is determined instead of the temperature rise of the windings		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
11.8	The temperature rise of the body of the motor, where in contact with insulating material, not exceeding values in table 3 for the relevant insulating material		N/A
16	Leakage current and electric strength		—
16.3	Insulation between live parts of the motor and its other metal parts is not subjected to the test		N/A
19	Abnormal operation		—
19.1	The tests of 19.7 to 19.9 are not carried out		N/A
19.1.101	Appliance operated at rated voltage with each of the following fault conditions:		—
	- short circuit of the terminals of the motor, including any capacitor incorporated in the motor circuit		N/A
	- short circuit of each diode of the rectifier		N/A
	- open circuit of the supply to the motor		N/A
	- open circuit of any parallel resistor, the motor being in operation		N/A
	Only one fault simulated at a time, the tests carried out consecutively		N/A
22	Construction		—
22.1.101	For class I appliances incorporating a motor supplied by a rectifier circuit, the d.c. circuit being insulated from accessible parts of the appliance by double or reinforced insulation		N/A
	Compliance checked by the tests specified for double and reinforced insulation		N/A
J	ANNEX J (NORMATIVE) COATED PRINTED CIRCUIT BOARDS		—
	Testing of protective coatings of printed circuit boards carried out in accordance with IEC 60664-3 with the following modifications:		—
5.7	Conditioning of the test specimens		—
	When production samples are used, three samples of the printed circuit board are tested		N/A
5.7.1	Cold		—
	The test is carried out at -25 °C		N/A
5.7.3	Rapid change of temperature		—
	Severity 1 is specified		N/A
5.9	Additional tests		—
	This subclause is not applicable		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
K	ANNEX K (NORMATIVE) OVERVOLTAGE CATEGORIES		—
	The information on overvoltage categories is extracted from IEC 60664-1	OVC II	P
	Overvoltage category is a numeral defining a transient overvoltage condition		P
	Equipment of overvoltage category IV is for use at the origin of the installation		N/A
	Equipment of overvoltage category III is equipment in fixed installations and for cases where the reliability and the availability of the equipment is subject to special requirements		N/A
	Equipment of overvoltage category II is energy consuming equipment to be supplied from the fixed installation		P
	If such equipment is subjected to special requirements with regard to reliability and availability, overvoltage category III applies		N/A
	Equipment of overvoltage category I is equipment for connection to circuits in which measures are taken to limit transient overvoltages to an appropriate low level		N/A
L	ANNEX L (INFORMATIVE) GUIDANCE FOR THE MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES		—
	Information for the determination of clearances and creepage distances		P
M	ANNEX M (NORMATIVE) POLLUTION DEGREE		—
	The information on pollution degrees is extracted from IEC 60664-1		P
	Pollution		—
	The microenvironment determines the effect of pollution on the insulation, taking into account the macroenvironment		P
	Means may be provided to reduce pollution at the insulation by effective enclosures or similar		P
	Minimum clearances specified where pollution may be present in the microenvironment		P
	Degrees of pollution in the microenvironment		—
	For evaluating creepage distances, the following degrees of pollution in the microenvironment are established:		—

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	- pollution degree 1: no pollution or only dry, non-conductive pollution occurs. The pollution has no influence		N/A
	- pollution degree 2: only non-conductive pollution occurs, except that occasionally a temporary conductivity caused by condensation is to be expected	For controller part	P
	- pollution degree 3: conductive pollution occurs or dry non-conductive pollution occurs that becomes conductive due to condensation that is to be expected	For flexible part	P
	- pollution degree 4: the pollution generates persistent conductivity caused by conductive dust or by rain or snow		N/A
N	ANNEX N (NORMATIVE) PROOF TRACKING TEST		—
	The proof tracking test is carried out in accordance with IEC 60112 with the following modifications:		—
7	Test apparatus		—
7.3	Test solutions		—
	Test solution A is used		N/A
10	Determination of proof tracking index (PTI)		—
10.1	Procedure		—
	The proof voltage is 100V, 175V, 400V or 600V.. :		N/A
	The test is carried out on five specimens		N/A
	In case of doubt, additional test with proof voltage reduced by 25V, the number of drops increased to 100		N/A
10.2	Report		—
	The report states if the PTI value was based on a test using 100 drops with a test voltage of (PTI-25) V		N/A
O	ANNEX O (INFORMATIVE) SELECTION AND SEQUENCE OF THE TESTS OF CLAUSE 30		—
	Description of tests for determination of resistance to heat and fire		N/A
P	ANNEX P (INFORMATIVE) GUIDANCE FOR THE APPLICATION OF THIS STANDARD TO APPLIANCES USED IN WARM DAMP EQUABLE CLIMATES		—

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	Modifications applicable for class 0 and 01 appliances having a rated voltage exceeding 150V, intended to be used in countries having a warm damp equable climate and that are marked WDaE		—
	Modifications may also be applied to class 1 appliances having a rated voltage exceeding 150V, intended to be used in countries having a warm damp equable climate and that are marked WdaE, if liable to be connected to a supply mains that excludes the protective earthing conductor		—
5.7	The ambient temperature for the tests of clauses 11 and 13 is 40 +3/0 °C		N/A
7.1	The appliance marked with the letters WDaE		N/A
7.12	The instructions state that the appliance is to be supplied through a residual current device (RCD) having a rated residual operating current not exceeding 30 mA		N/A
	The instructions state that the appliance is considered to be suitable for use in countries having a warm damp equable climate, but may also be used in other countries		N/A
11.8	The values of Table 3 are reduced by 15 K		N/A
13.2	The leakage current for class I appliances not exceeding 0,5 mA		N/A
15.3	The value of t is 37 °C		N/A
16.2	The leakage current for class I appliances not exceeding 0,5 mA (mA):		N/A
19.13	The leakage current test of 16.2 is applied in addition to the electric strength test of 16.3		N/A
Q	ANNEX Q (INFORMATIVE) SEQUENCE OF TESTS FOR THE EVALUATION OF ELECTRONIC CIRCUITS		—
	Description of tests for appliances incorporating electronic circuits		—
R	ANNEX R (NORMATIVE) SOFTWARE EVALUATION		—
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 validated in accordance with the requirements of this annex		N/A
R.1	Programmable electronic circuits using software		—
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 constructed so that the software does not impair compliance with the requirements of this standard		N/A
R.2	Requirements for the architecture		—

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2 use measures to control and avoid software-related faults/errors in safety-related data and safety-related segments of the software		N/A
R.2.1.1	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.2 have one of the following structures:		—
	- single channel with periodic self-test and monitoring		N/A
	- dual channel (homogenous) with comparison		N/A
	- dual channel (diverse) with comparison		N/A
	Programmable electronic circuits requiring software incorporating measures to control the fault/error conditions specified in table R.1 have one of the following structures:		—
	- single channel with functional test		N/A
	- single channel with periodic self-test		N/A
	- dual channel without comparison		N/A
R.2.2	Measures to control faults/errors		—
R.2.2.1	When redundant memory with comparison is provided on two areas of the same component, the data in one area is stored in a different format from that in the other area		N/A
R.2.2.2	Programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.2 and that use dual channel structures with comparison, have additional fault/error detection means for any fault/errors not detected by the comparison		N/A
R.2.2.3	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, means are provided for the recognition and control of errors in transmissions to external safety-related data paths		N/A
R.2.2.4	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, the programmable electronic circuits incorporate measures to address the fault/errors in safety-related segments and data indicated in table R.1 and R.2 as appropriate		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
R.2.2.5	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, detection of a fault/error occur before compliance with clause 19 is impaired		N/A
R.2.2.6	The software is referenced to relevant parts of the operating sequence and the associated hardware functions		N/A
R.2.2.7	Labels used for memory locations are unique		N/A
R.2.2.8	The software is protected from user alteration of safety-related segments and data		N/A
R.2.2.9	Software and safety-related hardware under its control is initialized and terminates before compliance with clause 19 is impaired		N/A
R.3	Measures to avoid errors		—
R.3.1	General		—
	For programmable electronic circuits with functions requiring software incorporating measures to control the fault/error conditions specified in table R.1 or R.2, the following measures to avoid systematic fault in the software are applied		—
	Software that incorporates measures used to control the fault/error conditions specified in table R.2 is inherently acceptable for software required to control the fault/error conditions specified in table R.1		N/A
R.3.2	Specification		—
R.3.2.1	Software safety requirements:	Software Id:	N/A
	The specification of the software safety requirements includes the descriptions listed		N/A
R.3.2.2	Software architecture		—
R.3.2.2.1	The specification of the software architecture includes the aspects listed - techniques and measures to control software faults/errors (refer to R.2.2); - interactions between hardware and software; - partitioning into modules and their allocation to the specified safety functions; - hierarchy and call structure of the modules (control flow); - interrupt handling; - data flow and restrictions on data access; - architecture and storage of data; - time-based dependencies of sequences and data	Document ref. No:	N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
R.3.2.2.2	The architecture specification is validated against the specification of the software safety requirements by static analysis		N/A
R.3.2.3	Module design and coding		—
R.3.2.3.1	Based on the architecture design, software is suitably refined into modules		N/A
	Software module design and coding is implemented in a way that is traceable to the software architecture and requirements		N/A
R.3.2.3.2	Software code is structured		N/A
R.3.2.3.3	Coded software is validated against the module specification by static analysis		N/A
	The module specification is validated against the architecture specification by static analysis		N/A
R.3.3.3	Software validation		—
	The software is validated with reference to the requirements of the software safety requirements specification		N/A
	Compliance is checked by simulation of:		—
	- input signals present during normal operation		N/A
	- anticipated occurrences		N/A
	- undesired conditions requiring system action		N/A

TABLE R.1 – GENERAL FAULT/ERROR CONDITIONS						
Component ¹⁾	Fault/error	Acceptable measures ^{2) 3)}	Definitions	Document reference for applied measure	Document reference for applied test	Verdict

IEC 60335-2-17						
Clause	Requirement + Test		Result - Remark			Verdict
1 CPU						N/A
1.1 Registers	Stuck at	Functional test, or periodic self-test using either: <ul style="list-style-type: none"> - static memory test, or - word protection with single bit redundancy 	H.2.16.5 H.2.16.6 H.2.19.6 H.2.19.8.2			
1.2 VOID						
1.3 Programme counter	Stuck at	Functional test, or Periodic self-test, or Independent time-slot monitoring, or Logical monitoring of the programme sequence	H.2.16.5 H.2.16.6 H.2.18.10.4 H.2.18.10.2			N/A
2 Interrupt handling and execution	No interrupt or too frequent interrupt	Functional test, or time-slot monitoring	H.2.16.5 H.2.18.10.4			N/A
3 Clock	Wrong frequency (for quartz synchronized clock: harmonics/ sub-harmonics only)	Frequency monitoring, or time slot monitoring	H.2.18.10.1 H.2.18.10.4			N/A
4. Memory						N/A
4.1 Invariable memory	All single bit faults	Periodic modified checksum, or multiple checksum, or word protection with single bit redundancy	H.2.19.3.1 H.2.19.3.2 H.2.19.8.2			
4.2 Variable memory	DC fault	Periodic static memory test, or word protection with single bit redundancy	H.2.19.6 H.2.19.8.2			N/A
4.3 Addressing (relevant to variable and invariable memory)	Stuck at	Word protection with single bit redundancy including the address	H.2.19.8.2			N/A

IEC 60335-2-17						
Clause	Requirement + Test		Result - Remark			Verdict
5 Internal data path	Stuck at DC fault	Word protection with single bit redundancy Comparison of redundant CPUs by either: - reciprocal comparison - independent hardware comparator	H.2.19.8.2 H.2.18.15 H.2.18.3			N/A
5.1 VOID						
5.2 Addressing	Wrong address	Word protection with single bit redundancy including the address	H.2.19.8.2			N/A
6 External communication	Hamming distance 3	Word protection with multi-bit redundancy, or CRC – single work, or Transfer redundancy, or Protocol test	H.2.19.8.1 H.2.19.4.1 H.2.18.2.2 H.2.18.14			N/A
6.1 VOID						
6.2 VOID						
6.3 Timing	Wrong point in time Wrong sequence	Time-slot monitoring, or scheduled transmission Time-slot and logical monitoring, or Comparison of redundant communication channels by either: - reciprocal comparison - independent hardware comparator Logical monitoring, or time-slot monitoring, or Scheduled transmission (same options as for wrong point in time)	H.2.18.10.4 H.2.18.18 H.2.18.10.3 H.2.18.15 H.2.18.3 H.2.18.10.2 H.2.18.10.4 H.2.18.18			N/A

IEC 60335-2-17						
Clause	Requirement + Test			Result - Remark		Verdict
7 Input/output periphery	Fault conditions specified in 19.11.2	Plausibility check Comparison of redundant communication channels by either: - reciprocal comparison - independent hardware comparator	H.2.18.13 H.2.18.15 H.2.18.3			N/A
7.1 VOID						
7.2 Analog I/O 7.2.1 A/D and D/A- converter	Fault conditions specified in 19.11.2	Plausibility check	H.2.18.13			N/A
7.2.2 Analog multiplexer	Wrong addressing	Plausibility check	H.2.18.13			N/A
8 VOID						
9 Custom chips ⁴⁾ e.g. ASIC, GAL, Gate array	Any output outside the static and dynamic functional specification	Periodic self-test	H.2.16.6			N/A
NOTE A Stuck-at fault model denotes a fault model representing an open circuit or a non-varying signal level. A DC fault model denotes a stuck-at fault model incorporating short circuit between signal lines.						
¹⁾ For fault/error assessment, some components are divided into their sub-functions. ²⁾ For each sub-function in the table, the Table R.2 measure will cover the software fault/error. ³⁾ Where more than one measure is given for a sub-function, these are alternatives. ⁴⁾ To be divided as necessary by the manufacturer into sub-functions.						

CC	ANNEX CC (NORMATIVE) CLOTHING (IEC 60335-2-17)			—
5	General conditions for the tests			—
5.7	The modification is not applicable			N/A
6	Classification			N/A
6.1	Clothing of Class III			N/A
7	Marking and instructions			N/A
7.1	Marking "Do not use folded or rucked" or symbol, not required			N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
7.12	Instruction "Do not crease the appliance by placing items on top of it during storage" applicable to clothing		N/A
	Instructions for clothing state:		—
	Control adjusted to the setting recommended for continuous use (clothing likely to be used for an extended period)		N/A
	Advice on precautions and how to recognize heat fatigue and the onset of heat stroke		N/A
	Warning for clothing, other than controlled.		N/A
11	Heating		N/A
11.3	Thermocouples are tied with textile thread over a length at least 10 mm (heating elements)		N/A
	Thermocouples are attached to brass or copper disk (flexible part)		N/A
11.8	Temperatures not exceeding values in table 101 or table 102		N/A
19	Abnormal operation		N/A
19.11.3	Test of 19.203 not repeated		N/A
19.201	Test of clothing with 4-layers fold and partial covering		N/A
	Inherently controlled appliance at voltage (V) (0,9-1,1 times rated voltage) :		N/A
	Other appliances at input (W) (0,85-1,24 times rated input) :		N/A
19.202	Test of clothing with heated areas positioned as close as possible to each other and uncovered		N/A
	Inherently controlled appliance at voltage (V) (0,9-1,1 times rated voltage) :		N/A
	Other appliances at input (W) (0,85-1,24 times rated input) :		N/A
19.203	Clothing, test of Clause 11 repeated with controls adjusted to the highest setting for continuous use and simulated single component failure		N/A
	Max. surface temperature does not exceed 75 °C (controlled clothing).....:		N/A
	Max. surface temperature rise does not exceed 70 K (other clothing intended for use in sub-zero temperatures).....:		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
	Max. surface temperature rise does not exceed 55 K (other clothing).....:		N/A
21	Mechanical strength		N/A
21.104	Plywood support covered by a sheet of thermal insulation		N/A
22	Construction		N/A
22.105	Not applicable		N/A
25	Supply connection and external flexible cords		N/A
25.1	Clothing fitted with an appliance inlet		N/A
25.23	Addition applied to clothing		N/A
30	Resistance to heat and fire		N/A
30.2	Clothing, 30.2.2 applied		N/A

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict

10.1	TABLE: Power input deviation					P
Input deviation of/at:	P rated (W)	P measured (W)	ΔP	Required ΔP	Remark	
100 V~, 50 Hz	500	516.6	3.3 %	+10 %, -20 %		
100 V~, 60 Hz	500	504.2	0.8 %	+10 %, -20 %		
Supplementary information:						

10.2	TABLE: Current deviation					N/A
Current deviation of/at:	I rated (A)	I measured (A)	ΔI	Required ΔI	Remark	
Supplementary information:						

11.8	TABLE: Heating test				P
	Test voltage (V)..... :	1) 94 / 106, 2) 106			—
	Ambient (°C)..... :	1) 20.3 / 20.5, 2) 21.5			—
Thermocouple locations:		Max. temperature measured, (°C)	Max. temperature rise measured, ΔT (K)	Max. temperature limit, (°C)	Max. temperature rise limit, ΔT (K)
1) 11.8					
Supply cord		36.8 / 38.9	16.5 / 18.4	-	50
Fuse		40.1 / 41.4	19.8 / 20.9	85	60
X capacitor (C9)		46.3 / 46.8	26.0 / 26.3	-	20
X capacitor (C5)		34.6 / 37.7	14.3 / 17.2	-	20
Opto coupler		51.1 / 49.4	30.8 / 28.9	115	90
PCB		32.4 / 36.0	12.1 / 15.5	130	105
Capacitor (C8)		28.6 / 33.4	8.3 / 12.9	105	80
Knob (Controller)		32.1 / 32.3	11.8 / 11.8	-	60
Enclosure (Controller)		36.2 / 36.7	15.9 / 16.2	-	60
Heating cable		62.7 / 61.3	42.4 / 40.8	100	-
Pad surface		47.2 / 46.2	26.9 / 25.7	50	-
Test corner		21.3 / 21.5	1.0 / 1.0	-	65
2) 11.102					

IEC 60335-2-17				
Clause	Requirement + Test		Result - Remark	Verdict
Supply cord	36.8	15.3	-	50
Fuse	40.6	18.6	85	60
X capacitor (C9)	46.8	24.8	-	20
X capacitor (C5)	34.1	13.1	-	20
Opto coupler	52.1	29.6	115	90
PCB	33.2	10.9	130	105
Capacitor (C8)	29.6	7.1	105	80
Knob (Controller)	32.0	10.6	-	60
Enclosure (Controller)	37.2	14.7	-	60
Heating cable	63.7	41.2	100	-
Pad surface	50.2	25.7	85	-
Test corner	22.3	0.1	-	65
Supplementary information:				

11.8	TABLE: Heating test, resistance method					N/A
	Test voltage (V).....:					—
	Ambient, t1 (°C).....:					—
	Ambient, t2 (°C).....:					—
Temperature rise of winding:		R1 (Ω)	R2 (Ω)	Δ T (K)	Max. Δ T (K)	Insulation class
Supplementary information:						

13.2	TABLE: Leakage current					P
	Heating appliances: 1.15 x rated input (W) .. :				-	—
	Motor-operated and combined appliances: 1.06 x rated voltage (V)				106 V	—
Leakage current between:				I (mA)	Max. allowed I (mA)	
Live part and accessible parts (Non earthed controller parts)				0.01	0.35	
Live part and accessible parts (Non earthed flexible parts parts)				0.01	0.5	
Supplementary information:						

13.3	TABLE: Dielectric strength					P
-------------	-----------------------------------	--	--	--	--	---

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
Test voltage applied between:		Test potential applied (V)	Breakdown / flashover (Yes/No)
Reinforced insulation		2500	No
Supplementary information:			

14	TABLE: Transient overvoltages					N/A
Clearance between:	CI (mm)	Required CI (mm)	Rated impulse voltage (V)	Impulse test voltage (V)	Flashover (Yes/No)	
Supplementary information:						

16.2	TABLE: Leakage current			P
	Single phase appliances: 1.06 x rated voltage (V)..... :	106 V		—
	Three phase appliances 1.06 x rated voltage divided by $\sqrt{3}$ (V)..... :	-		—
Leakage current between:		I (mA)	Max. allowed I (mA)	
Live part and accessible parts (Non earthed controller parts)		0.01	0.25	
Live part and accessible parts (Non earthed flexible parts parts)		0.01	1.0	
Supplementary information:				

16.3	TABLE: Dielectric strength			P
Test voltage applied between:		Test potential applied (V)	Breakdown / flashover (Yes/No)	
Reinforced insulation		3000	No	
Supplementary information:				

17	TABLE: Overload protection			N/A
Thermocouple locations:		Max. temperature rise measured, Δ T (K)	Max. temperature rise limit, Δ T (K)	

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
Supplementary information:			

17	TABLE: Overload protection, resistance method					N/A
	Test voltage (V).....:					—
	Ambient, t1 (°C).....:					—
	Ambient, t2 (°C).....:					—
Temperature of winding:		R1 (Ω)	R2 (Ω)	Δ T (K)	T (°C)	Max. T (°C)
Supplementary information:						

19	Abnormal operation conditions						P
Operational characteristics			YES/NO	Operational conditions			
Are there electronic circuits to control the appliance operation?			Yes				
Are there “off” or “stand-by” position?			No				
The unintended operation of the appliance results in dangerous malfunction?			No				
Sub-clause	Operating conditions description	Test results description	PEC description	EMP 19.11.4	Software type required	19.11.3 PEC	Final result
19.11.2	Applied one fault condition at a time	No hazard	N/A	N/A	N/A	N/A	P
19.11.4.8	N/A	N/A	N/A	N/A	N/A	N/A	N/A
19.102	N/A	N/A	N/A	N/A	N/A	N/A	N/A
19.107	N/A	N/A	N/A	N/A	N/A	N/A	N/A
19.108	Thermistor S/C	No hazard	N/A	N/A	N/A	N/A	P
19.109	Two-thirds of flexible part positioned so that it overhangs the edge of the plywood support	N/A	N/A	N/A	N/A	N/A	P

IEC 60335-2-17							
Clause	Requirement + Test			Result - Remark			Verdict
19.110	Three-thickness fold	N/A	N/A	N/A	N/A	N/A	P
19.111	Opto coupler S/C	No hazard	N/A	N/A	N/A	N/A	P
19.111	C8 S/C	No hazard	N/A	N/A	N/A	N/A	P
19.111	Triac S/C	No hazard	N/A	N/A	N/A	N/A	P
19.111	C5 S/C	Fuse opened, No hazard	N/A	N/A	N/A	N/A	P
19.111	C9 S/C	Fuse opened, No hazard	N/A	N/A	N/A	N/A	P
19.112	N/A	N/A	N/A	N/A	N/A	N/A	N/A
19.113	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Supplementary information:							

19.7	TABLE: Abnormal operation, locked rotor/moving parts					N/A
	Test voltage (V).....:					—
	Ambient, t1 (°C).....:					—
	Ambient, t2 (°C).....:					—
Temperature of winding:		R1 (Ω)	R2 (Ω)	Δ T (K)	T (°C)	Max. T (°C)
Supplementary information:						

19.9	TABLE: Abnormal operation, running overload					N/A
	Test voltage (V).....:					—
	Ambient, t1 (°C).....:					—
	Ambient, t2 (°C).....:					—
Temperature of winding:		R1 (Ω)	R2 (Ω)	Δ T (K)	T (°C)	Max. T (°C)
Supplementary information:						

19.13	TABLE: Abnormal operation, temperature rises					P
-------	--	--	--	--	--	---

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict
Thermocouple locations:		Max. temperature rise measured, ΔT (K)	Max. temperature rise limit, ΔT (K)
Supply cord		3.5	150
Heating cable		110.0 °C	160 °C
Pad surface		70.4 °C	165 °C
Test corner		19.8	150
Supplementary information:			

21.1	TABLE: Impact resistance			P
Impacts per surface	Surface tested	Impact energy (Nm)	Comments	
3 times	Enclosure	0.5 J	No damaged	
Supplementary information:				

IEC 60335-2-17						
Clause	Requirement + Test			Result - Remark		Verdict
21.111	TABLE: elongation and tensile strength measurements					N/A
	D = outside diameter			(mm)		
	d = inside diameter			(mm)		
	E = elongation at rupture			(%)		
	F = force at rupture			(N)		
	T = tensile strength calculated from results			(MPa)		
	average inside diameter d (mm):					—
	average outside diameter D (mm):					—
	measurements on unaged samples:					
sample 1 sample 2 sample 3 sample 4 sample 5 sample 6						
Elongation E (%)						
F rupture (N)						
Shrinkage (%)						
	average E in % (%):					—
	limit 100% minimum:					—
	T in MPa (MPa):					—
	limit 8,75 MPa minimum:					—
	measurements on aged samples:					
sample 1 sample 2 sample 3 sample 4 sample 5 sample 6						
Elongation E (%)						
F rupture (N)						
T tensile strength MPa						
Shrinkage (%)						
	average E aged in % (%):					—
	minimum limit E (%):					—
	(75% of average E unaged):					—
	T aged in MPa (MPa):					—
	minimum limit T (MPa):					—
	(75% of T unaged):					—
	max. shrinkage in % (%):					—
	maximum limit 10% (%):					—

IEC 60335-2-17					
Clause	Requirement + Test			Result - Remark	Verdict
24.1	TABLE: Critical components information				P
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾
Power plug	KOREA KDK	KKP-210	125 V~, 7 A	Appendix 4 Section 1, Section 6 and Appendix 10 Chapter 5	JET
interchangeable	DONGGUAN YINGHAO	SY-41	125 V~, 7 A		
interchangeable	WONMI ELECTRONICS	WJP-02	125 V~, 7 A		
Supply cord (Inlet)	KOREA KDK	VCTFK	2 x 0.75 mm ²	Appendix 1 Section 1, (1), (6) and (9)	JET
interchangeable	DONGGUAN POWERYUAN	VCTFK	2 x 0.75 mm ²		
interchangeable	WONMI ELECTRONICS	VCTFK	2 x 0.75 mm ²		
Heating cable	Eunseong Industrial Co., Ltd	STH-01	100 V~, 50/60 Hz, 500 W	IEC 60335-1 IEC 60335-2-17	Tested in appliance
Thermal Protector	SENSATA TECHNOLOGIES	17AM	250 V, 10 A, 90 °C	IEC 60730-1 IEC 60730-2-2	CB
Thermistor	ISTEC CO LTD	SK103xy	25°C (10 ohm), Tmoa (°C)	ANSI/UL 60730-1	UL
Enclosure	LG CHEMICAL	AF367	V-0, min. 2.47 mm thickness	UL 94	UL
Fuse (F1)	SUZHOU WALTER ELECTRONIC CO., LTD.	2010T6.3A250V	125 V, 6.3 A	Appendix 3 Section 2	JET
X capacitor (C9)	ZHUHAI SUNG HO ELECTRONICS CO LTD	CMPP	275 V, 224 K	IEC 60384-14	VDE
Connector (CN2)	GEOYEOUNG	GW396-3-2	V-0	UL 94	UL
Opto coupler	Everlight Electronics Co., Ltd.	EL3043	Cr.: 7.0 mm, Cl.: 7.0 mm, Climatic category: 55/115/21	EN IEC 60747-5-5	VDE

IEC 60335-2-17					
Clause	Requirement + Test			Result - Remark	Verdict
Varistor	Centra Science Corp.	CNR 7D 471	Max. continuous voltage: 300 V, Max. peak current: 1200 A	EN 61051-1 IEC 61051-2:1 IEC 61051-2-2	VDE
PCB	KINGBOARD LAMINATES HOLDINGS LTD	KB-5150A	V-0, 130 °C	UL 796	UL
Supplementary information: 1) Provided evidence ensures the agreed level of compliance. See OD-2039.					

28.1	TABLE: Threaded part torque test			P
Threaded part identification:		Diameter of thread (mm)	Column number (I, II, or III)	Applied torque (Nm)
Fixed screw		3.10	II	0.6
Supplementary information:				

IEC 60335-2-17						
Clause	Requirement + Test			Result - Remark		Verdict
29.1	TABLE: Clearances					P
	Overvoltage category			II		—
		Type of insulation:				
Rated impulse voltage (V):	Min. cl (mm)	Basic (mm)	Supplementary (mm)	Reinforced (mm)	Functional (mm)	Verdict / Remark
330	0,2* / 0,5 / 0,8**	-	-	-	-	N/A
500	0,2* / 0,5 / 0,8**	-	-	-	-	N/A
800	0,2* / 0,5 / 0,8**	-	-	-	-	N/A
1 500	0,5 / 0,8** / 1,0***	>2.5	-	-	-	P
2 500	1,5 / 2,0***	-	-	>5.0	-	P
4 000	3,0 / 3,5***	-	-	-	-	N/A
6 000	5,5 / 6,0***	-	-	-	-	N/A
8 000	8,0 / 8,5***	-	-	-	-	N/A
10 000	11,0 / 11,5***	-	-	-	-	N/A
Supplementary information: *) For tracks on printed circuit boards if pollution degree 1 and 2 **) For pollution degree 3 ***) If the construction is affected by wear, distortion, movement of the parts or during assembly						

IEC 60335-2-17											
Clause	Requirement + Test							Result - Remark			Verdict
29.2	TABLE: Creepage distances, basic, supplementary and reinforced insulation										P
Working voltage (V)	Creepage distance (mm) Pollution degree										
	1	2			3			Type of insulation			Verdict
		Material group			Material group						
		I	II	IIIa/III b	I	II	IIIa/III b*	B**	S**	R**	
≤50	0,18	0,6	0,85	1,2	1,5	1,7	1,9		—	—	N/A
≤50	0,18	0,6	0,85	1,2	1,5	1,7	1,9	—		—	N/A
≤50	0,36	1,2	1,7	2,4	3,0	3,4	3,8	—	—		N/A
125	0,28	0,75	1,05	<u>1,5</u>	1,9	2,1	2,4	>2.5	—	—	P
125	0,28	0,75	1,05	1,5	1,9	2,1	2,4	—		—	N/A
125	0,56	1,5	2,1	<u>3,0</u>	3,8	4,2	4,8	—	—	>5.0	P
250	0,56	1,25	1,8	2,5	3,2	3,6	4,0		—	—	N/A
250	0,56	1,25	1,8	2,5	3,2	3,6	4,0	—		—	N/A
250	1,12	2,5	3,6	5,0	6,4	7,2	8,0	—	—		N/A
400	1,0	2,0	2,8	4,0	5,0	5,6	6,3		—	—	N/A
400	1,0	2,0	2,8	4,0	5,0	5,6	6,3	—		—	N/A
400	2,0	4,0	5,6	8,0	10,0	11,2	12,6	—	—		N/A
500	1,3	2,5	3,6	5,0	6,3	7,1	8,0		—	—	N/A
500	1,3	2,5	3,6	5,0	6,3	7,1	8,0	—		—	N/A
500	2,6	5,0	7,2	10,0	12,6	14,2	16,0	—	—		N/A
>630 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0		—	—	N/A
>630 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0	—		—	N/A
>630 and ≤800	3,6	6,4	9,0	12,6	16,0	18,0	20,0	—	—		N/A
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5		—	—	N/A
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5	—		—	N/A
>800 and ≤1000	4,8	8,0	11,2	16,0	20,0	22,0	25,0	—	—		N/A
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0		—	—	N/A
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0	—		—	N/A
>1000 and ≤1250	6,4	10,0	14,2	20,0	25,0	28,0	32,0	—	—		N/A
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0		—	—	N/A

IEC 60335-2-17											
Clause	Requirement + Test							Result - Remark			Verdict
29.2	TABLE: Creepage distances, basic, supplementary and reinforced insulation										P
Working voltage (V)	Creepage distance (mm) Pollution degree										
	1	2			3			Type of insulation			Verdict
		Material group			Material group						
		I	II	IIIa/III b	I	II	IIIa/III b*	B**	S**	R**	
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0	—		—	N/A
>1250 and ≤1600	8,4	12,6	18,0	25,0	32,0	36,0	40,0	—	—		N/A
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0		—	—	N/A
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0	—		—	N/A
>1600 and ≤2000	11,2	16,0	22,0	32,0	40,0	44,0	50,0	—	—		N/A
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0		—	—	N/A
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0	—		—	N/A
>2000 and ≤2500	15,0	20,0	28,0	40,0	50,0	56,0	64,0	—	—		N/A
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0		—	—	N/A
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0	—		—	N/A
>2500 and ≤3200	20,0	25,0	36,0	50,0	64,0	72,0	80,0	—	—		N/A
>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0		—	—	N/A
>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0	—		—	N/A
>3200 and ≤4000	25,0	32,0	44,0	64,0	80,0	90,0	100,0	—	—		N/A
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0		—	—	N/A
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0	—		—	N/A
>4000 and ≤5000	32,0	40,0	56,0	80,0	100,0	11 2,0	126,0	—	—		N/A
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0		—	—	N/A
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0	—		—	N/A
>5000 and ≤6300	40,0	50,0	72,0	100,0	126,0	142,0	160,0	—	—		N/A
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0		—	—	N/A
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0	—		—	N/A
>6300 and ≤8000	50,0	64,0	90,0	126,0	160,0	180,0	200,0	—	—		N/A
>8000 and ≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0		—	—	N/A

IEC 60335-2-17												
Clause		Requirement + Test						Result - Remark			Verdict	
29.2		TABLE: Creepage distances, basic, supplementary and reinforced insulation									P	
Working voltage (V)		Creepage distance (mm) Pollution degree									Verdict	
		1	2			3			Type of insulation			
			Material group			Material group						
			I	II	IIIa/III b	I	II	IIIa/III b*	B**	S**		R**
>8000 and ≤10000		32,0	40,0	56,0	80,0	100,0	110,0	125,0	—		—	N/A
>8000 and ≤10000		64,0	80,0	112,0	160,0	200,0	220,0	250,0	—	—		N/A
>10000 and ≤12500		40,0	50,0	71,0	100,0	125,0	140,0	160,0		—	—	N/A
>10000 and ≤12500		40,0	50,0	71,0	100,0	125,0	140,0	160,0	—		—	N/A
>10000 and ≤12500		80,0	100,0	142,0	200,0	250,0	280,0	320,0	—	—		N/A
Supplementary information:												
*) Material group IIIb is allowed if the working voltage does not exceed 50 V												
**) B = Basic insulation, S = Supplementary insulation, R = Reinforced insulation												

IEC 60335-2-17								
Clause	Requirement + Test				Result - Remark			Verdict
29.2	TABLE: Creepage distances, functional insulation							N/A
Working voltage (V)	Creepage distance (mm) Pollution degree							Verdict / Remark
	1	2			3			
		Material group			Material group			
		I	II	IIIa/IIIb	I	II	IIIa/IIIb*	
≤10	0,08	0,4	0,4	0,4	1,0	1,0	1,0	N/A
50	0,16	0,56	0,8	1,1	1,4	1,6	1,8	N/A
125	0,25	0,71	1,0	1,4	1,8	2,0	2,2	N/A
250	0,42	1,0	1,4	2,0	2,5	2,8	3,2	N/A
400	0,75	1,6	2,2	3,2	4,0	4,5	5,0	N/A
500	1,0	2,0	2,8	4,0	5,0	5,6	6,3	N/A
>630 and ≤800	1,8	3,2	4,5	6,3	8,0	9,0	10,0	N/A
>800 and ≤1000	2,4	4,0	5,6	8,0	10,0	11,0	12,5	N/A
>1000 and ≤1250	3,2	5,0	7,1	10,0	12,5	14,0	16,0	N/A
>1250 and ≤1600	4,2	6,3	9,0	12,5	16,0	18,0	20,0	N/A
>1600 and ≤2000	5,6	8,0	11,0	16,0	20,0	22,0	25,0	N/A
>2000 and ≤2500	7,5	10,0	14,0	20,0	25,0	28,0	32,0	N/A
>2500 and ≤3200	10,0	12,5	18,0	25,0	32,0	36,0	40,0	N/A
>3200 and ≤4000	12,5	16,0	22,0	32,0	40,0	45,0	50,0	N/A
>4000 and ≤5000	16,0	20,0	28,0	40,0	50,0	56,0	63,0	N/A
>5000 and ≤6300	20,0	25,0	36,0	50,0	63,0	71,0	80,0	N/A
>6300 and ≤8000	25,0	32,0	45,0	63,0	80,0	90,0	100,0	N/A
>8000 and ≤10000	32,0	40,0	56,0	80,0	100,0	110,0	125,0	N/A
>10000 and ≤12500	40,0	50,0	71,0	100,0	125,0	140,0	160,0	N/A
Supplementary information:								
*) Material group IIIb is allowed if the working voltage does not exceed 50 V								

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict

30.1	TABLE: Ball Pressure Test of Thermoplastics			P
Allowed impression diameter (mm) :				—
Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)	Impression diameter (mm)	
Enclosure	-	75	0.8	
Connector	-	125	0.5	
Supplementary information:				

30.2	TABLE: Resistance to heat and fire - Glow wire tests							P
Object/ Part No./ Material	Manufacturer / trademark	Glow wire test (GWT); (°C)						Verdict
		550	650		750		850	
			te	ti	te	ti		
Enclosure	-	x	-	-	-	-	-	P
Connector	-	-	-	-	0 s	0 s	x	P
Object/ Part No./ Material	Manufacturer / trademark	Glow-wire flammability index (GWFI), °C				GW ignition temp. (GWIT), °C		Verdict
		550	650	750	850	675	775	
The test specimen passed the glow wire test (GWT) with no ignition [(te – ti) ≤ 2s] (Yes/No):								Yes
If no, then surrounding parts passed the needle-flame test of annex E (Yes/No)..... :								—
The test specimen passed the test by virtue of most of the flaming material being withdrawn with the glow-wire (Yes/No)? :								No
Ignition of the specified layer placed underneath the test specimen (Yes/No) :								No
Supplementary information:								
- 550 °C GWT not relevant (or applicable) to parts of material classified at least HB40 or if relevant HBF								
- The GWIT pre-selection option, the 850 °C GWFI pre-selection option, and the 850 °C GWT are not relevant (or applicable) for attended appliances								

IEC 60335-2-17			
Clause	Requirement + Test	Result - Remark	Verdict

30.2/30.2.4	TABLE: Needle- flame test (NFT)				N/A
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
Supplementary information: - NFT not relevant (or applicable) for Parts of material classified as V-0 or V-1 - NFT not relevant (or applicable) for Base material of PCBs classified as V-0 or if relevant VTM-0					

Attachment 1. Photographs

Page 1 of 4



Fig 1. Product view



Fig 2. Controller view (Front)

Attachment 1. Photographs

Page 2 of 4



Fig 3. Controller view (Bottom)

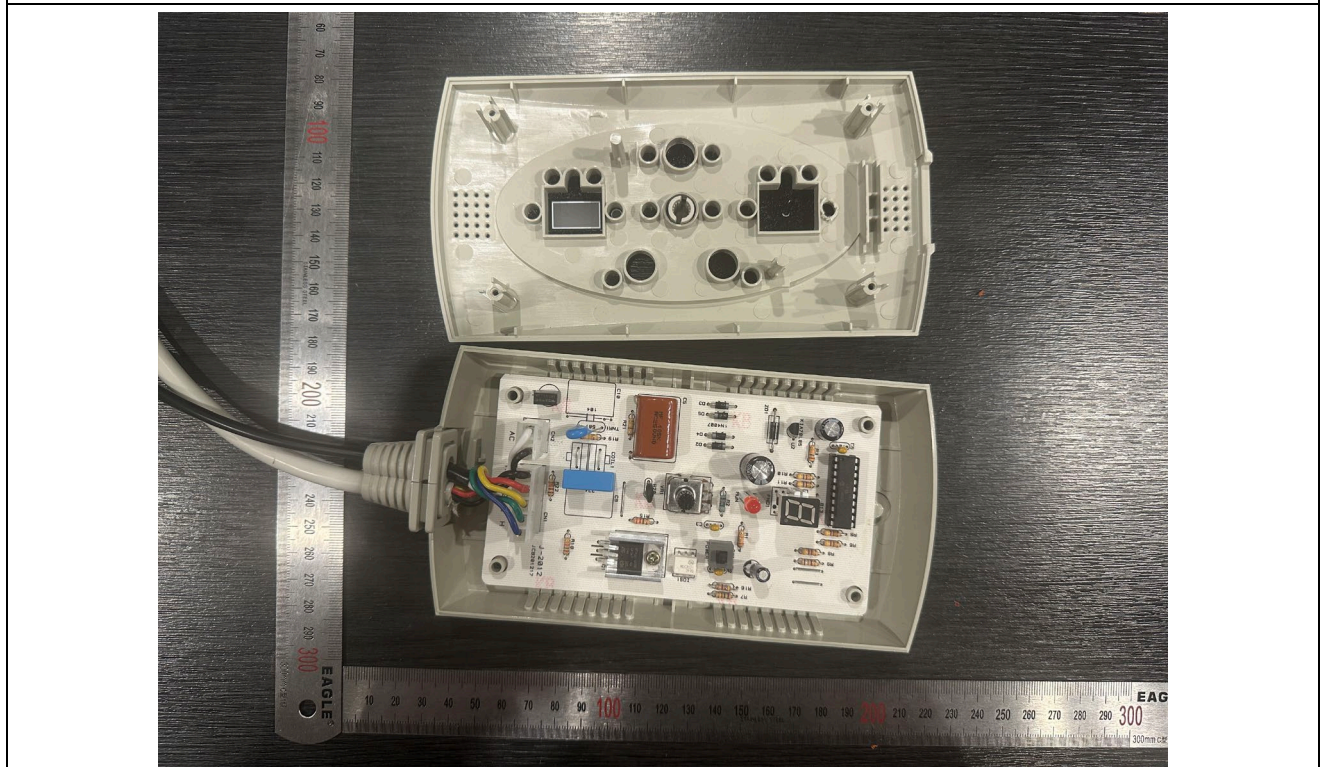


Fig 4. Internal controller view

Attachment 1. Photographs

Page 3 of 4

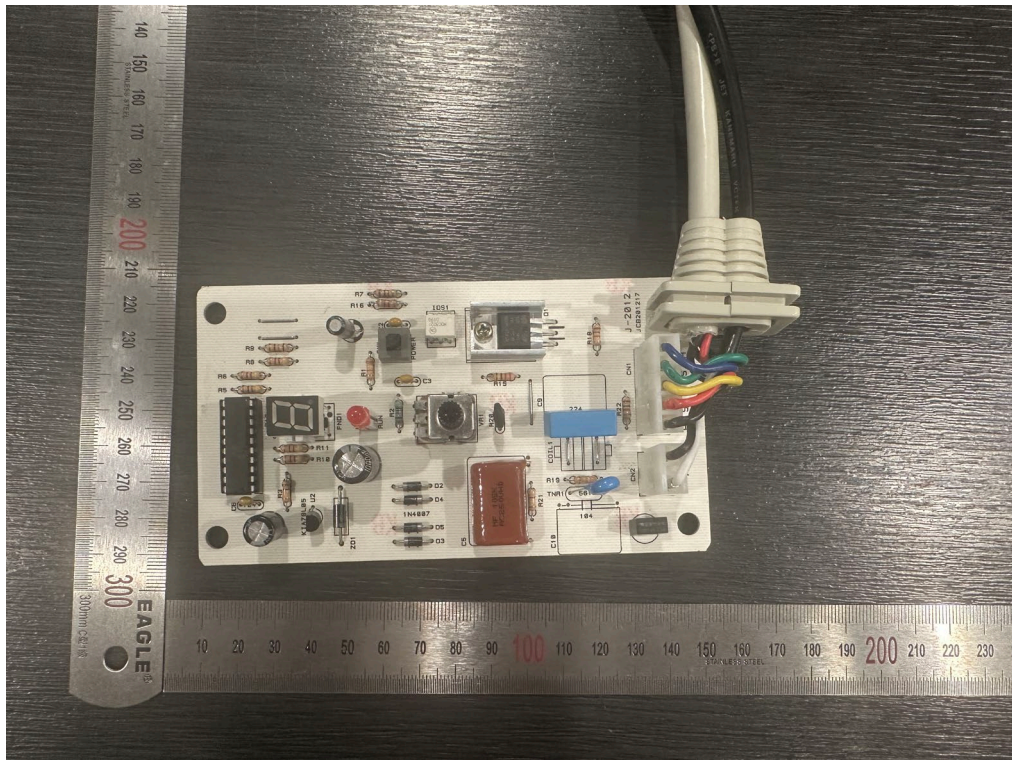


Fig 5. Controller PCB top

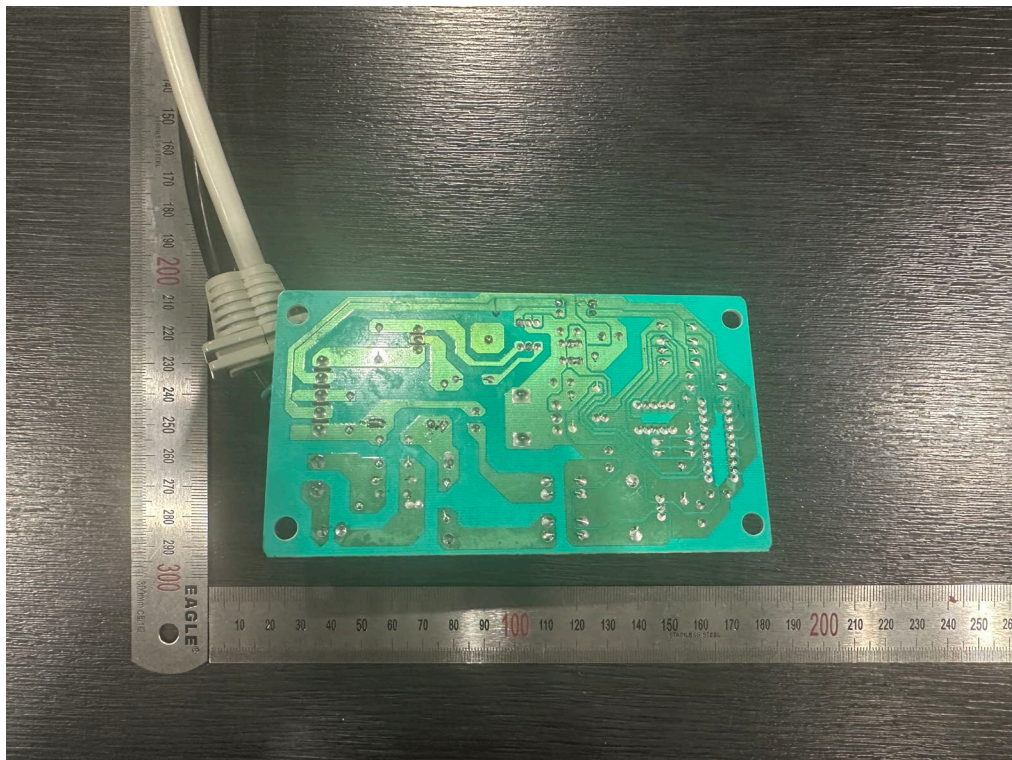


Fig 6. Controller PCB bottom

Attachment 1. Photographs

Page 4 of 4

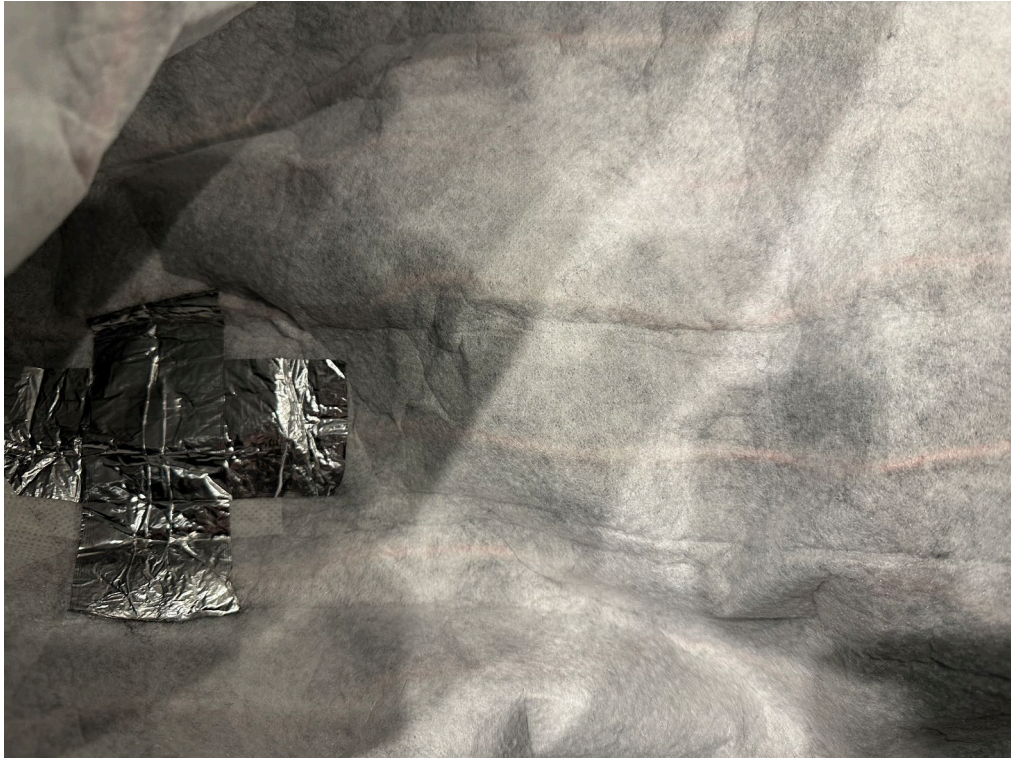


Fig 7. Internal heating cable view

J 60335-2-17 (2021)			
Clause	Requirement + Test	Result - Remark	Verdict
ATTACHMENT TO TEST REPORT 60335-2-17 JAPAN NATIONAL DIFFERENCES Safety of household and similar electrical appliances			
Differences according to : J 60335-2-17 (2021) used in conjunction with J 60335-1 (H27)			
TRF template used: : IECEE OD-2020-F3, Ed. 1.1			
Attachment Form No. : JP_ND_IEC60335_1Y_DST2312			
Attachment Originator..... : Japan Electrical Safety and Environment Technology Laboratories (JET)			
Master Attachment : Dated 2021-07-16			
Copyright © 2021 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			
	National Differences		—
6.	CLASSIFICATION		—
6.1	Class 0 is allowed only for the appliances of rated voltage not exceeding 150V and indoor use.		N/A
7.	MARKING		—
7.1	Replace 2nd dashed item with follows.		—
7.1	- symbol for nature of supply, unless <u>the appliance connected to single-phase two-wire system supply mains and the rated frequency is marked;</u>		P
	Add new dashed item before NOTE 1 as follows.		—
	- Rated frequency (Hz) <u>(for the appliances rated either 50 Hz or 60 Hz only)</u>		P
7.12	The instructions for class I appliances provided with a mains supply plug and either following a) to c) contain the warning as the substance of the following; " Warning: Electric shock hazard, where the appliance is used without the earth connection." <i>Example in Japanese:</i> “警告：機器を接地しないで使用すると感電する危険がある。”		N/A
	a) The appliances that is measured leakage current specified in 13.2 exceed the limit for the class 0I appliances where radio interference filters are not disconnected.		N/A

J 60335-2-17 (2021)			
Clause	Requirement + Test	Result - Remark	Verdict
	b) The appliances that do not comply with the minimum clearance of the value in parentheses specified in table 16 for the class 0I appliances of rated impulse voltage of 1 500 V.		N/A
	c) The appliances that have surge protective devices connected with live parts and accessible metal parts, unless the appliance intended to be installed by the professional installers.		N/A
7.12.5	For appliances with type X attachment that class 0I appliances provide with earthing terminal on outer surface and supplied without earthing conductors, unless the appliance connected by the electrician; Information with regard to cross-sectional area for the earthing conductors.		N/A
8.	PROTECTION AGAINST ACCESS TO LIVE PARTS		—
8.1.4	Replace 1st dashed item with follows.		—
8.1.4	- the part is supplied at safety extra-low voltage <u>or for class 0 appliance, by isolating transformer withstood the electric strength test for reinforced insulation specified in 16.3</u> , provided that: · for a.c., the peak value of the voltage does not exceed 42.4 V; · for d.c., the voltage does not exceed 42.4 V.		N/A
11.	HEATING		—
11.8, Table3	Delete the reference to E27		P
	Replace footnote f as follows.		—
	f The temperature rise has to be determined in order that the tests of 30.1 can be carried out. Materials for which temperature limits are not specified in the table, but which comply with the requirements as shown in Attachment 1, are considered to be acceptable.		P
	Add new footnote k as follows.		—
	k This limit applies to cords and wires complying with the relevant IEC standards. In other case, they comply with the requirements as shown in Attachment 1, are considered to be acceptable.		N/A
13.	LEAKAGE CURRENT AND ELECTRIC STRENGTH AT OPERATING TEMPERATURE		—
13.1	For class 0I appliances, test of 13.2 is also carried out that the appliances are operated at rated voltage and radio interference filters are not disconnected.		N/A
13.2	Replace 3rd dashed item of 8th paragraph as follows.		—

J 60335-2-17 (2021)			
Clause	Requirement + Test	Result - Remark	Verdict
	- for class 0I appliances • <u>radio interference filters disconnected</u> 0,5 mA • <u>radio interference filters not disconnected</u> 1,0 mA		N/A
16.	LEAKAGE CURRENT AND ELECTRIC STRENGTH		—
16.2	Replace 2nd paragraph as follows.		—
	<u>The test voltage is 1.06 times rated voltage.</u>		—
16.3	Replace the last sentence of the paragraph after Table 7 as follows.		—
	The test voltage is 1250 V for class 0 appliances, <u>class 0I appliances</u> and class I appliances and 1750 V for class II appliances.		—
17.	OVERLOAD PROTECTION OF TRANSFORMERS AND ASSOCIATED CIRCUITS		—
	Replace 3rd paragraph as follows.		—
	Temperature rise of insulation of the conductors of safety extra-low voltage circuits and for <u>class 0 appliances</u> , the circuit separated by isolating transformer complied with 8.1.4 not exceed the relevant value specified in table 3 by more than 15 K.		N/A
19.	ABNORMAL OPERATION		—
19.12	Replace 1st paragraph as follows.		—
	If safety of the appliance depends upon the operation of a miniature fuse-link complying with IEC 60127 or <u>Appendix 3 of the interpretation of Ministerial Ordinance Specifying Technical Standards for Electrical Appliances and Materials</u> during any of the fault conditions specified in 19.11.2, the test is repeated but with the miniature fuse-link replaced by an ammeter. If the current measured		P
	– does not exceed 2,1 times the rated current of the fuse-link, the circuit is not considered to be adequately protected and the test is carried out with the fuse-link short-circuited;		N/A
	– is at least 2,75 times the rated current of the fuse-link, the circuit is considered to be adequately protected;		N/A

J 60335-2-17 (2021)			
Clause	Requirement + Test	Result - Remark	Verdict
	<ul style="list-style-type: none"> – is between 2,1 times and 2,75 times the rated current of the fuse-link, the fuse link is short-circuited and the test is carried out • for the relevant period or for 30 min, whichever is the shorter, for quick acting fuse-links; • for the relevant period or for 2 min, whichever is the shorter, for time lag fuse-links. • <u>for the relevant period or for 4 min, whichever is the shorter, for fuse-link without marking for quick acting fuse-links or time lag fuse-links.</u> 		N/A
	<p>NOTE 1 In case of doubt, the maximum resistance of the fuse-link has to be taken into account when determining the current.</p> <p>NOTE 2 The verification whether the fuse-link acts as a protective device is based on the fusing characteristics specified in IEC 60127, which also gives the information necessary to calculate the maximum resistance of the fuse-link.</p> <p>NOTE 3 Other fuses are considered to be intentionally weak parts in accordance with 19.1.</p> <p><u>NOTE 4 If the fusing characteristics are different from IEC 60127, those characteristics are taken into consideration.</u></p>		—
19.15A	Heating appliances with parallel connected rectifiers for control the power in mains circuit are disconnected a rectifier. The appliance is not cause hazards.		N/A
	Rated current of the rectifier is not less than the input current of the appliance and the rectifiers are the same specification.		N/A
	Appliance is operated under the conditions specified in Clause 11 but with disconnection of one rectifier. The appliance complies with Clause 11.		N/A
21.	MECHANICAL STRENGTH		—
21.2	Test not applicable if the thickness of supplementary insulation is at least 1 mm and reinforced insulation at least 2 mm, <u>or the thickness of plastic enclosures used as basic insulation of class 0 appliances is at least 0.3 mm</u>		P
	Replace 1st sentence of 3rd paragraph as follows.		—
	<u>For supplementary or reinforced insulation of class II construction</u> , the insulation is raised to the temperature measured during the test of Clause 11.		P
	Add new paragraph after the last paragraph as follows.		—

J 60335-2-17 (2021)																	
Clause	Requirement + Test	Result - Remark	Verdict														
	For basic insulation of class 0 appliances, the insulation is subjected following tests.:		N/A														
	<div>- The insulation is subjected to a voltage for 1 min. The values of the test voltages are specified in following table. No breakdown occurs during the test.</div> <table><tr><th>Working voltage (U) V</th><th>Test voltage V</th></tr><tr><td>≤30</td><td>500</td></tr><tr><td>>30 and ≤150</td><td>1000</td></tr><tr><td>>150 and ≤300</td><td>1500</td></tr><tr><td>>300 and ≤1000</td><td>2U+1000</td></tr><tr><td>>1000 and ≤3000</td><td>1.5U+500 or 3000, whichever is higher</td></tr><tr><td>>3000</td><td>1.5U or 5000, whichever is higher</td></tr></table>	Working voltage (U) V	Test voltage V	≤30	500	>30 and ≤150	1000	>150 and ≤300	1500	>300 and ≤1000	2U+1000	>1000 and ≤3000	1.5U+500 or 3000, whichever is higher	>3000	1.5U or 5000, whichever is higher		P
Working voltage (U) V	Test voltage V																
≤30	500																
>30 and ≤150	1000																
>150 and ≤300	1500																
>300 and ≤1000	2U+1000																
>1000 and ≤3000	1.5U+500 or 3000, whichever is higher																
>3000	1.5U or 5000, whichever is higher																
	- The insulation is subjected pencil scratch test (pencil hardness test) specified in 6.14 of JIS K 5400 (1979). Hardness degree specified in JIS S 6006 (1984) is 8H. Scratch of the specimen does not reach the test board.		N/A														
22.	CONSTRUCTION		—														
22.31	For part of soldering connections of wirings relation to basic insulation, the wire is held by mechanical means such as hooking conductor into a hole of the terminal or twisting conductors together, before soldering.	Considered	P														
22.39	Lamp holders for fluorescent lamps specified JIS C 8324 (except GX53 lamp holders) are not used for connection of other than fluorescent lamps, unless that is not detachable part defined in 3.6.2 and that comply with this standard or proper lamp standard.	No lamp holder	N/A														
22.44	This requirement is not applicable to the appliance intended to be used by children. NOTE 2 Example of such appliance is kiddie rides (JISC9335-2-82).		N/A														
22.52	Replace 1st paragraph as follows.		—														
22.52	<u>Socket-outlets and appliance outlets on other than class I appliances</u> , accessible to the user cannot connect with class I appliances.		N/A														

J 60335-2-17 (2021)			
Clause	Requirement + Test	Result - Remark	Verdict
22.52A	Surge protective devices are not connected between live parts and accessible metal parts of class 0I appliances, unless the appliances are intended to be installed by the professional installers.		N/A
24.	COMPONENTS		—
24.8A	Operating temperature of heat sensing wires used in the appliances is not significantly changed at normal operation. Compliance is checked by Annex JA.		N/A
25.	SUPPLY CONNECTION AND EXTERNAL FLEXIBLE CORDS		—
25.3	Replace 2nd dashed item of 1st paragraph as follows.		—
	- A fitted supply cord, if the appliance that the maximum input current is equal to or more than 10 A and that has stranded wire leads for connection to supply mains, the leads comply with one of the following:		N/A
	• the leads are accommodated in suitable partition space in or attached to the appliance, or		N/A
	• pin terminals for connection to screwless terminals are crimped at tip of the leads, or		N/A
	• junction box (including outlet box) with suitable space for connection the lead and supply mains is specified in the instructions for use or installation.		N/A
25.8	For class 0I appliance provided 2pin plug with protective earth leads be comply with the requirement of supply cord. Protective earthing conductor of other class 0I appliance is accordance with the interpretation of Ministerial Ordinance Specifying Technical Standards for Electrical Installation (Paragraph 4 of Article 17)		N/A
25.8, Table 11	Add new sentence to the last of footnote a as follows.		—
	In this case, a fuse with the rated current not exceeding 3 A and the rated breaking capacity at least 500 A is incorporated inside the plug.		N/A
25.10	For earthing conductors provided with class 0I appliances, the conductor to connect to earthing terminal have a green/yellow coloured insulation		N/A
25.22	Add 2 new dashed items in 1st paragraph as follows.		—
	- not be magnetic inlet, unless permitted by relevant part 2;		N/A

J 60335-2-17 (2021)									
Clause	Requirement + Test			Result - Remark	Verdict				
	- be so constructed that soldering parts of its terminals are not subjected to mechanical stress during insertion or removal of the connector, if the appliance inlets are complied with JIS C 8283-1, unless fixing of the appliance inlets does not rely only on the soldering.				N/A				
25.25	Replacement:				—				
	Dimensions of pins and engagement face in accordance with the dimensions of the relevant plug in <u>Attachment 2</u> .				N/A				
26.	TERMINALS FOR EXTERNAL CONDUCTORS				—				
26.11A	Class 0I appliance is provided a protective earthing terminal on easily visible position of enclosure or an earthing lead.				N/A				
29.	CREEPAGE DISTANCES, CLEARANCES AND DISTANCES THROUGH INSULATION				—				
29.1 Table 15	Add column ">300 and ≤600" for Rated voltage as follows. <table><tr><td>>300 and ≤600</td><td>2 500</td><td>4 000</td><td>6 000</td></tr></table>			>300 and ≤600	2 500	4 000	6 000		N/A
>300 and ≤600	2 500	4 000	6 000						
29.1 Table 16	Replace column "1500" for Rated impulse voltage as follows. <table><tr><td>1500</td><td>0.5 ° (1.5) ^e</td></tr></table> Add new footnote e as follows: ^e) The value with parenthesis applies to basic insulation for class 0 appliances and between live parts and earthed accessible metal parts for class 0I appliances.			1500	0.5 ° (1.5) ^e		N/A		
1500	0.5 ° (1.5) ^e								
Figures	FIGURES				—				
Figure 3	Replace figure legend for "Connections and supplies" as follows.				—				
Figure 3	L ₁ , L ₂ , L ₃ supply voltage (lines) of three-phase N neutral for star connection or earth for delta connection.				—				
Figure 4	Replace figure legend for "Connections and supplies" as follows.				—				
Figure 4	L ₁ , L ₂ , L ₃ supply voltage (lines) of three-phase N neutral for star connection or earth for delta connection.				—				
B.	ANNEX B APPLIANCES POWERED BY RECHARGEABLE BATTERIES				—				
B.30.2	Replace subclause 30.2 as follows.				—				
B.30.2	For parts of the appliance that are connected to the supply mains during the charging period, 30.2.3 applies. For other parts, <u>requirements of relevant part 2</u> apply.				N/A				

J 60335-2-17 (2021)			
Clause	Requirement + Test	Result - Remark	Verdict
JA	ANNEX JA(NORMATIVE) UNIFORMITY OF HEAT SENSING WIRES		—
	If heat sensing wires are used in appliances to prevent excessive temperature rise, the deviation of operating temperature for those heat sensing wires comply with the Table JA.1.		N/A
	Type of heat sensing wires		—
	Mean operating temperature (°C)		—
	Lower operating temperature deviation (°C)		—
	Upper operating temperature deviation (°C)		N/A
	Arrowed operating temperature deviation (°C)		N/A
Attachment 1	ATTACHMENT 1 OF IEC 60335-1		—
	The insulating material is not exposed to the temperature exceeding the values specified in Appendix 11 of the Interpretation of the Ministerial Ordinance Specifying Technical Standards for Electrical Appliances and Materials, when the appliances are operated at rated voltage and normal operation.		N/A
	The values may be increased by;		—
	- 8 degrees for Duty 2 appliances, and		—
	- 16 degrees for Duty 3 appliances.		—
Attachment 2	ATTACHMENT 2 OF IEC 60335-1		—
	Dimensions of the pins and engagement face are in accordance with the dimensions specified in Table 1.		N/A
	For folded blades, the blades are complied with follows;		—
	- Whole thickness of the blades are 1.5 mm±0.15 mm. And thickness of each metal plates that compose the blades, are at least 0.6 mm.		N/A
	- The bases of the blades are entered in the body to prevent unfolding of the blades.		N/A
	The hole of flat blades is chamfered on both sides except for the hole of twist locking type flat blades is chamfered on outside.		N/A
	The tips of the blades are rounded or chamfered etc. for easily to be plugged into slots of socket-outlet. For the plugs specified in Figure 1, 5, 6, 7, 10, 11, 14 and 15, thickness at the tips of chamfered blades (except folded blades) is 0.9mm or less.		N/A